



With partners across China and the world,
NORTH has a truly national and international
understanding and unparalleled collective expertise.

HEAD OFFICE, MANUFACTURING & SALES

Jinan North Welding Tools Co Ltd
The North of 308 National Highway,
Daqiao Town, Tianqiao Zone
Jinan 250121
Shandong, P.R. China

China Sales: 0531 8896 2089

International Sales: +86 531 8861 0336
sale@north-weld.com

Australia (Asia Pacific Enquiries)

North Welding Pty Ltd
143 Bradman Street
Acacia Ridge 4110 QLD
Australia

Tel: +617 3344 6555

Fax: +617 3344 4222

sales@north-weldau.com



Catalogue



We Chat
News and Updates
China only

A Welding and Cutting Torch Series for Everyone TM
northweld.com

NC001-03-0824

CATALOGUE 2024

JINAN NORTH WELDING TOOLS CO LTD

"We've raised the bar with our 2024 product range from NORTH! You've picked the right catalogue. Explore and discover the perfect torch for you.

Our three Signature Torch Series now feature a robust selection of new products, expanding variety and opportunities.

After a challenging 2020/21, North™ recalibrated both internally and externally. Our new showroom and manufacturing facility are now fully operational.

Innovation and inclusivity are core values. With ongoing fine-tuning of our systems, we offer better integration and functionality to meet customer needs.

Celebrating our 30th anniversary in 2022, we have focused on:

- Modernizing business processes
- Enhancing system integration and B2B relationships
- Expanding all three signature product series
- Innovating new products and categories

For the first time, North™ now offers TIG Welding and Plasma cutting torches. As we progress with our product lines, we are closer to becoming a complete supplier of MIG/MAG, TIG, Plasma torches, and accessories.

Our torches and torch systems are available in at least one of our three Signature Performance Series (Tiers):

- Magnifik Series (Best)
- Selekt Series (Better)
- Klasik Series (Basic)

Thank you for your continuous support. Enjoy our 2024 Catalogue!"

North has a torch series for everyone.
Mr Meng MAO



Contents

INTRODUCTION
TORCH SELECTION GUIDES
NEW PRODUCTS
PRODUCTS

Magnifik 10

- PUSH PULL 推拉丝气保焊枪
- MTR MTR 式焊枪

Selekt 22

- MIG BZL 欧式
- MIG PNA 松下式
- MIG BRD BRD 式
- MIG TWE TWE 式
- TIG (NEW) 新型氩弧焊枪

Klasik 40

- BZL 欧式
- PNA 松下式
- OTC OTC 式
- NQ BRD NQ 式
- NB BRD NB 式
- TWE TWE 式
- FLUX 自保护焊枪
- VALVE DIY 气阀焊枪
- PUSH-PULL 推拉丝焊枪
- SPOOL 拉丝焊枪
- MIG FUME 环保吸烟焊枪
- DUAL / DOUBLE WIRES 双丝焊枪
- TIG 氩弧焊枪
- PLASMA 等离子割枪

Accessories 104

- EARTH CLAMPS 接地钳
- ELECTRODE HOLDERS 电焊钳
- EARTH CLAMP 接地钳
- WELDING PLIERS 焊接用多功能工具钳
- WORKSHOP STOOL 焊接用椅
- DINSE STYLE CABLE CONNECTORS DINSE 连接件
- DINSE STYLE PANEL SOCKET DINSE 连接件
- TIG DINSE ADAPTORS
- DINSE STYLE ADAPTORS DINSE 连接座
- TIG ADAPTOR
- MEASUREMENT GUAGE



OUR 3 PRODUCT TIERS



Our best, top of the line and most innovative torch series. Created with the future of welding and cutting equipment initiative.

Not only new products; but solutions for the problems we encounter as welders.



Our most valued high performance torches. Perfect for the everyday welding professional.

An array of products for maximum versatility and jobs.



Our true, tried and tested torch series. Full of the same high performance but more simple and rigid design.

Perfect for a balanced budget and quality performance.

MIG TORCH EASY FIND GUIDE

MAGNIFIK

*
PAGE
STYLE
Cooling Method

PART NO.	16 BRD Air	16 PUSHPULL Water	16 PUSHPULL Water	20 BRD Air	20 BRD Air	20 BRD Air
Rating CO ₂	MPG 300	MPW 300	MPW 400	MTR 300	MTR 400	MTR 500
Rating Mixed	290A	350A	450A	300A	400A	500A
Duty Cycle	260A	300A	400A	200A	300A	350A
Wire Size	60%	100%	100%	60%	60%	60%
	0.8-1.2	0.8-1.2	1.0-1.6	0.8-1.2	1.0-1.6	1.0-1.6

24 BZL Air	24 BZL Air	24 BZL Air	24 BZL Air	25 BZL Air	25 BZL Air	25 BZL Air	25 BZL Air	25 BZL Air	26 BZL Water
SN15F/15S	SN15FE	SN24F/24S	SN25F/25S	SN26F	SN36F/36S	SN38F	SN40F	SN240F	
180A	180A	250A	230A	290A	340A	350A	400A	300A	
150A	150A	220A	200A	260A	300A	320A	380A	270A	
60%	60%	60%	60%	60%	60%	60%	60%	100%	
0.6-1.0	0.6-1.0	0.8-1.2	0.8-1.2	0.8-1.2	0.8-1.6	1.0-1.6	1.0-1.6	0.8-1.2	

26 BZL Water	26 BZL Water	26 BZL Water	28 PNA Air	28 PNA Air	28 PNA Air	28 PNA Air	31 BRD Air	31 BRD Air	
SN410F/401S	SN510F/501S	SN550	SQTB200	SQTB350	SQTB500	SQTB600	SNQ200	SNQ300	
500A/400A	550A/500A	550AA	200A	350A	500A	600A	200A	300A	
450A/350A	500A/450A	500AA	180A	300A	420A	500A	150A	200A	
100%	100%	100%	60%	60%	60%	35%	60%	60%	
1.0-1.6	1.0-1.6	1.0-1.6	0.8-1.2	1.0-1.4	1.2-1.6	1.2-1.6	0.8-1.2	0.8-1.2	

31 BRD Air	32 BRD NB Air	32 BRD NB Air	32 BRD NB Air	34 TWE Air	34 TWE Air	34 TWE Air	34 TWE Air		
SNQ400	SNB200	SNB300	SNB400	SNT1	SNT2	SNT4	SNT5		
400A	200A	300A	400A	180A	200A	400A	500A		
320A	150A	200A	320A	125A	150A	350A	400A		
60%	60%	60%	60%	60%	60%	60%	60%		
0.8-1.6	0.8-1.2	0.8-1.2	0.8-1.6	0.6-1.2	0.6-1.2	0.8-2.0	0.9-2.4		

43 BZL Air	43 BZL Air	43 BZL Air	43 BZL Air	43 BZL Air	44 BZL Air	44 BZL Air	44 BZL Water	44 BZL Water	
N15	N15FE	N24	N25	N26	N36	N40	NW-24	NW-501	
180A	180A	250A	230A	290A	340A	350A	300A	500A	
150A	150A	220A	200A	260A	300A	320A	270A	450A	
60%	60%	60%	60%	60%	60%	60%	100%	100%	
0.6-1.0	0.6-1.0	0.8-1.2	0.8-1.2	0.8-1.2	0.8-1.6	1.0-2.4	0.8-1.2	1.0-1.6	

44 BZL Water	46 PNA Air	46 PNA Air	46 PNA Air	46 PNA Air	48 OTC Air	48 OTC Air	48 OTC Air		
NMT551	QTB200A	QTB350A	QTB500A	QTB600A	QTB200A	QTB350A	QTB500A		
600A	200A CO ₂	350A CO ₂	500A CO ₂	600A CO ₂	200A CO ₂	350A CO ₂	500A CO ₂		
550A	180A Mixed	300A Mixed	420A Mixed	500A Mixed	180A Mixed	300A Mixed	420A Mixed		
100%	60%	60%	60%	35%	60%	60%	60%		
1.0-1.6	0.8-1.2	1.0-1.4	1.2-1.6	1.2-2.0	0.8-1.2	1.0-1.4	1.2-1.6		

50 BRD Air	50 BRD Air	50 BRD Air	52 BRD NB Air	52 BRD NB Air	52 BRD NB Air
NQ200	NQ300	NQ400	NB200	NB300	NB400
200A	300A	400A	200A	300A	400A
150A	200A	320A	150A	200A	320A
60%	60%	60%	60%	60%	60%
0.8-1.2	0.8-1.2	0.8-1.6	0.8-1.2	0.8-1.2	0.8-1.6

54 TWE Air	54 TWE Air	54 TWE Air	54 TWE Air	54 TWE Air	54 TWE Air
NT1	NT2	NT4	NT5	NT2B	NT4B
180A	200A	400A	500A	200A	400A
125A	150A	350A	400A	150A	350A
60%	60%	60%	60%	60%	60%
0.6-1.2	0.6-1.2	0.8-2.0	0.9-2.4	0.6-1.2	0.8-1.2

56 FLUX Air	56 FLUX Air	58 VALVE Air	58 VALVE Air
NK126	NK115	QTB-90AF	QTB-100AF
350A	450A	Mixed	Mixed
		90A	100A
60%	60%	35%	35%
0.9-2.4	2.0-3.0	0.6-1.0	0.6-1.0

MIG

KLASIK

PUSHPULL Air	PUSHPULL Water	PUSHPULL Air	PUSHPULL Water	PUSHPULL Air	SPOOL Air	SPOOL Air	SPOOL Water
60	60	60	60	62	62	62	62
PG 4000	PW 5000	QTLB-24D	QTLB-36D	QLBF-200 III	QLBF-185	QTLB-24D-SP	QTLB-36D-SP
400A	500A	200A	350A	200A	180A	200A	350A
350A	400A	160A	300A	160A	160A	160A	300A
40%	100%	60%	60%	60%	60%	60%	60%
0.8-1.2	0.8-1.6	0.8-1.2	0.8-1.2	0.6-1.0	0.8-0.9	0.6-1.2	0.8-1.2

MIG FUME Air	MIG FUME Air	DUAL WIRE Water	DOUBLE WIRES Water
64	64	66	68
NEG 353	NEG503	SZMW500	SDW601
350A	500A	500A	600A
300A	420A	400A	500A
60%	60%	100%	100%
1.0-1.4	1.2-1.6	1.0-1.6	1.0-1.2

TIG TORCH EASY FIND GUIDE

PLASMA TORCH EASY FIND GUIDE

MAGNIFIK

SELEKT

KLASIK



*
PAGE
Cooling Method

PART NO.

Rating DC
Rating AC
Duty Cycle
Electrodes

					
38 Air	38 Air	38 Water	38 Water	38 Water	38 Air
NST9	NST17	NST20	NST30	NST18	NST26
125A	150A	250A	320A	350A	200A
100A	125A	180A	230A	270A	150A
60%	60%	100%	60%	100%	60%
0.5-1.6mm	0.5-2.4mm	0.5-3.2mm	0.5-3.2mm	0.5-4.0mm	0.5-3.2mm

TIG

							
72 Air	72 Air	72 Water	72 Water	72 Water	73 Air	73 Water	73 Water
KT9	KT17	KTW18	KTW18SC	KTW20	KT24	KTW24	KTW25
125A	150A	350A	400A	250A	110A	180A	250A
100A	125A	270A	280A	180A	95A	120A	220A
60%	60%	100%	100%	100%	60%	100%	100%
0.5-1.6mm	0.5-2.4mm	0.5-4.0mm	-	0.5-3.2mm	0.5-2.4mm	0.5-2.4mm	0.5-3.2mm

			
73 Air	74 Air	74 Water	74 Air
KT26	KTH17	KTHW18	KTH26
200A	150A	320A	200A
150A	125A	270A	150A
60%	60%	100%	60%
0.5-3.2mm	0.5-2.4mm	0.5-4.0mm	0.5-4.0mm

							
77 Air	77 Air	77 Water	77 Water	78 Air	78 Water	78 Water	78 Air
WP9	WP17	WP18	WP20	WP24	WP24W	WP25	WP26
125A	150A	350A	250A	110A	180A	250A	200A
100A	125A	270A	180A	95A	120A	220A	150A
60%	60%	100%	100%	60%	100%	100%	60%
0.5-1.6mm	0.5-2.4mm	0.5-4.0mm	0.5-3.2mm	0.5-2.4mm	0.5-2.4mm	0.5-3.2mm	0.5-4.0mm

				
78 Air	79 Air	79 Air	80 Water	80 Water
WP12	TIG150	TIG300	WP22	WP27
500A	120A	240A	250A	500A
-	80A	160A	180A	-
100%	60%	60%	100%	100%
1.6-6.4mm	-	-	-	-



*
PAGE
STYLE
Cooling Method

PART NO.

Rating
Duty Cycle
Cutting Thickness

	
86 NS Air	86 NS Air
NS105	NS125
100A/70A	120A/90A
60%/100%	60%/100%
25-30mm	10-35mm

PLASMA

							
88 NA Air	88 NA Air	88 NA Air	88 NA Air	90 CB Air	90 CB Air	90 CB Air	90 CB Air
NA81	NA101	NA141	NA151	CB50	CB70	CB100	CB150
80A/60A	100A/75A	140A/100A	150A/120A	50A/40A	70A/50A	100A/70A	150A/110A
60%/100%	60%/100%	60%/100%	60%/100%	60%/100%	60%/100%	60%/100%	60%/100%
20-25mm	25-30mm	35-40mm	35-40mm	10-15mm	18-24mm	24-30mm	35-40mm

							
92 NP Air	92 NP Air	92 NP Air	92 NP Air	94 NU Air	94 NU Air	100 CBP Air	100 CBP Air
PT31	SG55	AG60	NP80	NU35K	NU45	CB100P	CB150P
30A	60A	60A	80A	30A	40A	100A/70A	150A/110A
60%	60%	60%	60%	35%	60%	60%/100%	60%/100%
4-6mm	6-16mm	8-20mm	8-30mm	6-12mm	8-16mm	24-30mm	35-40mm

							
96 NSP Air	96 NSP Air	96 NSP Air	96 NSP Air	98 NA Air	98 NA Air	98 NA Air	98 NA Air
NS75P	NS80P	NS105P	NS125P	NA81P	NA101P	NA141P	NA151P
70A/50A	80A/60A	100A/70A	120A/90A	80A/60A	100A/75A	140A/100A	150A/120A
60%/100%	60%/100%	60%/100%	60%/100%	60%/100%	60%/100%	60%/100%	60%/100%
18-23mm	20-30mm	25-30mm	25-35mm	20-25mm	25-30mm	35-40mm	35-40mm

		
102 NW Water	102 NW Water	102 NW Water
NW103P	NW160P	NW200P
Coming Soon	Coming Soon	200A
		100%
		30-75mm

High Frequency 高频等离子割枪



2024

NEW PRODUCTS

MAGNIFIK		
MIG PUSH PULL		11
SELEKT		
TIG		35
KLASIK		
MIG FUME		63
DUAL / DOUBLE WIRES		65
TIG		70
PLASMA		82

Aesthetics & Performance All in one.

The NORTH Push Pull torch showcases beautiful style from the back of the handle around to the very front edge of the contact tip.

The engineering team contended on every possible detail in the design that we are able to present this product.

A design made to gain revenue by eleminating room for error, and providing a enoyable and quality welding experience.

**Light weight,
Superb comfort,
Powerful and Enduring.**

We've solved your problem. Take the next step and inquire with our team



*For the hardest of job.....
Get a North torch*



MAGNIFIK

NORTH

NEW

PUSHPULL 推拉丝焊枪

MPG 300 16

MPW 300 16

MPW 400 16

● **MTR** MTR 式焊枪

MTR 300 20

MTR 400 20

MTR 500 20

NEW



MAGNIFIK
PUSH
PULL

MAGNIFIK PUSH PULL



THE NEW PUSH-PULL WELDING EXPERIENCE

LIGHT WEIGHT,
SUPERB COMFORT,
POWERFUL AND ENDURING.

Easy read LCD
screen

Potentiometer
for wire speed
regulation.

Clear cover allows
visual reference of
all moving parts.

Access working parts
via a flip top cover.

Loosen the lock nut no
more than 1 turn.
Rotate to the position of
your choice and tighten
taper lock nut firmly to
secure desired position.

WE'VE SOLVED YOUR PROBLEM. TAKE
THE NEXT STEP AND INQUIRE WITH
OUR TEAM

Smooth revolving ball
joint and steel spring
cable support.

MAGNIFIK PUSH PULL




Mode selection and adjustment.

Non main stream dedicated consumables. Contact tips Binzel type.

Ribbed conture on handel allows for secure grip.

Led light for start up and see before welding

Torch Control Module Options

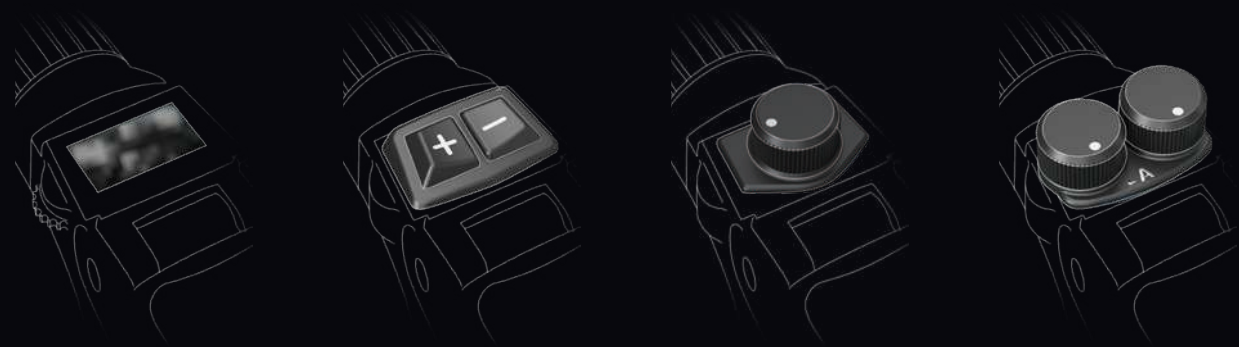

HIGH PERFORMANCE MIG



Technical Data 参数	MPG 300	MPW 300	MPW 400
Cooling Method 冷却方式	Air-Cooled	Water Cooled	Water Cooled
Rating : C0 ₂	290A	350A	450
Rating: Mixed Gas 混合气体	260A	300	400
Duty Cycle: 暂载率	60%	100%	100%
Wire Size: 焊丝直径	0.8-1.2	0.8-1.2	1.0-1.6
Motor1: 电机 1	18m/min, 24V	18m/min, 24V	18m/min, 24V
Motor2: 电机 2	25m/min, 24V	25m/min, 24V	25m/min, 24V

**HIGH
PERFORMANCE
MIG**




IT'S ALL IN THE DETAILS!
**DONT SACRAFICE COMFORT OVER
PERFORMANCE**

***ONE PIECE
TUBE HANDLE
DESIGN AT
BOTH FRONT
AND REAR
END***



MAGNIFIK MTR MIG TORCHES

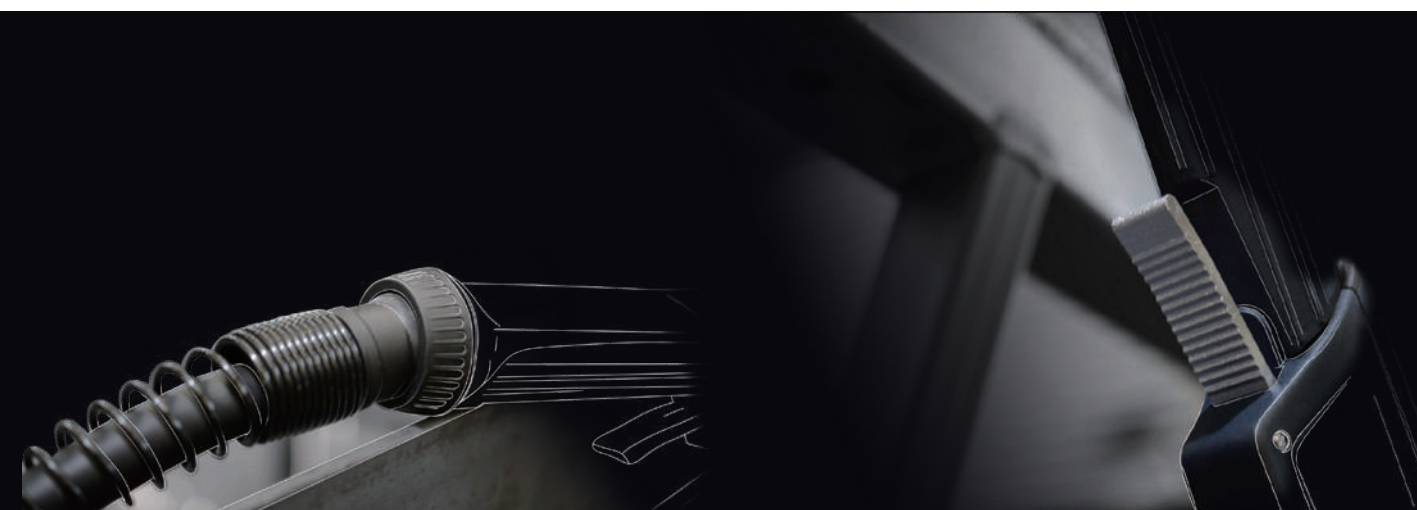

Smooth revolving ball
joint and steel spring
cable support.

Wide design, aluminium die cast
trigger with long life microswitch.

WHOLESALE OPTIONS AVAILABLE

MAGNIFIK

MTR MIG

TORCHES

HIGH PERFORMANCE MIG

CNC machined components

Screw on conductor tube

Technical Data 参数			MTR 300	MTR 400	MTR500
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled
Rating : C0₂			300A	400A	500
Rating: Mixed Gas 混合气体			200A	300	350
Duty Cycle: 暂载率			60%	60%	60%
Wire Size: 焊丝直径			0.030"-0.045" (0.8-1.2)	0.040"-1/16" (1.0-1.6)	0.040"-1/16" (1.0-1.6)
Order Part No.	TWECO FITTING	10FT/3M	MTR 300-10T	MTR 400-10T	MTR 500-10T
		12FT/3.6M	MTR 300-12T	MTR 400-12T	MTR 500-12T
		15FT/4.5M	MTR 300-15T	MTR 400-15T	MTR 500-15T
	MILLER FITTING	10FT/3M	MTR 300-10M	MTR 400-10M	MTR 500-10M
		12FT/3.6M	MTR 300-12M	MTR 400-12M	MTR 500-12M
		15FT/4.5M	MTR 300-15M	MTR 400-15M	MTR 500-15M

Need a great bead on your
next welding project....

Let our torch weave its magic

SELEKT

- **BZL** 欧式
 - SN 15F/15S 24
 - SN 15FE 24
 - SN 24F/24S 24
 - SN 25F/25S 24
 - SN 26F 25
 - SN 36F/36S 25
 - SN 38F 25
 - SN 40F 25
 - SN 240F 26
 - SN 410F/401S 26
 - SN 510F/510S 26
 - SN 550 26

- **PNA** 松下式
 - SQTB 200 28
 - SQTB 350 28
 - SQTB 500 28
 - SQTB 600 28

- **BRD NQ** BRD NQ 式
 - SNQ 200 31
 - SNQ 300 31
 - SNQ 400 31

- **BRD NB** BRD NB 式
 - SNB 200 32
 - SNB 300 32
 - SNB 400 32

- **TWE** TWE 式
 - SNT 1 34
 - SNT 2 34
 - SNT 4 34
 - SNT 5 34

NEW

- **TIG** 氩弧焊枪
 - NST-9 38
 - NST-17 38
 - NST20 38
 - NST-30 38
 - NST-18 38
 - NST-26 38

SELEKT

BZL MIG

TORCHES



Interchangeable locking ring for air and water cooled application.

Available with single and double buttons and with potentiometer

Ergonomic, lightweight and solid handle construction.

Smooth revolving ball joint and steel spring cable support.

Long reach extended trigger switch lever option to distance hand from weld zone.

Heavy duty metal jacket with high conductivity inner copper tube.

Improved back housing design with more grip.

IT'S ALL IN THE DETAILS!

100% + OEM MIG TORCH INTERCHANGABLE CNC MACHINED CONSUMABLE PARTS



Technical Data 参数	SN 15F/15S	SN 15FE	SN 24F/24S	SN 25F/25S
Cooling Method 冷却方式	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : C0 ₂	180A	180A	250A	230A
Rating: Mixed Gas 混合气体	150A	150A	220A	200A
Duty Cycle: 暂载率	60%	60%	60%	60%
Wire Size: 焊丝直径	0.6-1.0	0.6-1.0	0.8-1.2	0.8-1.2

Order Part No.	EURO FITTING	3M	SN 15F-3E	SN 15FE-3E	SN 24F-3E	SN 25F-3E
		4M	SN 15F-4E	SN 15FE-4E	SN 24F-4E	SN 25F-4E
		5M	SN 15F-5E	SN 15FE-5E	SN 24F-5E	SN 25F-5E
		3M	SN 15S-3E	-	SN 24S-3E	SN 25S-3E
		4M	SN 15S-4E	-	SN 24S-4E	SN 25S-4E
		5M	SN 15S-5E	-	SN 24S-5E	SN 25S-5E

AN ARRAY OF PRODUCTS FOR MAXIMUM VERSATILITY AND JOBS.

UNIQUE DESIGNED SWAN NECK CHANNELS CONSIDERABLY IMPROVES TORCH COOLING.



F- 4CE Swan Neck / S- Klasik Swan Neck F- 使用 4CE 枪头 S- 使用经典系列枪头



Technical Data 参数		SN 26F	SN 36F/36S	SN 38F	SN 40F
Cooling Method 冷却方式		Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : CO ₂		290A	340A	350A	400A
Rating: Mixed Gas 混合气体		260A	300A	320A	380A
Duty Cycle: 暂载率		60%	60%	60%	60%
Wire Size: 焊丝直径		0.8-1.2	0.8-1.6	1.0-1.6	1.0-1.6

Order Part No.	EURO FITTING	3M	SN 26F-3E	SN 36F-3E	SN 38F-3E	SN 40F-3E
		4M	SN 26F-4E	SN 36F-4E	SN 38F-4E	SN 40F-4E
		5M	SN 26F-5E	SN 36F-5E	SN 38F-5E	SN 40F-5E
		3M	-	SN 36S-3E	-	-
		4M	-	SN 36S-4E	-	-
		5M	-	SN 36S-5E	-	-



Technical Data 参数		SN240F	SN 410F/410S	SN 510F/501S	SN 550
Cooling Method 冷却方式		Water-Cooled	Water Cooled	Water Cooled	Water Cooled
Rating : CO ₂		300A	500A/400A	550A/500A	550A
Rating: Mixed Gas 混合气体		270A	450A/350A	500A/450A	500A
Duty Cycle: 暂载率		100%	100%	100%	60%
Wire Size: 焊丝直径		0.8-1.2	0.8-1.2	1.0-1.6	1.0-1.6

Order Part No.	EURO FITTING	3M	SN 240F-3E	SN 410F-3E	SN 510F-3E	SN 550-3E
		4M	SN 240F-4E	SN 410F-4E	SN 510F-4E	SN 550-4E
		5M	SN 240F-5E	SN 410F-5E	SN 510F-5E	SN 550-5E
		3M	-	SN 401S-3E	SN 501S-3E	-
		4M	-	SN 401S-4E	SN 501S-4E	-
		5M	-	SN 401S-5E	SN 501S-5E	-

F- 4CE Swan Neck / S- Klasik Swan Neck F- 使用 4CE 枪头 S- 使用经典系列枪头

F- 4CE Swan Neck / S- Klasik Swan Neck F- 使用 4CE 枪头 S- 使用经典系列枪头

SELEKT PNA MIG TORCHES

CNC machined consumable parts are 100% interchangeable with OEM MIG Torches



Available with single and double buttons and with potentiometer

Ergonomic, lightweight and solid handle construction.

Smooth revolving ball joint and steel spring cable support.

Heavy duty metal jacket with high conductivity inner copper tube.

Positive grip trigger with long life contacts.

Improved back housing design with more grip.

100%

QUALITY MADE
PROFESSIONAL TORCHES
PANASONIC COMPATABILITY



AN ARRAY OF PRODUCTS FOR MAXIMUM VERSATILITY AND JOBS.


QUESTION : KNOW THE DIFFERENCE
HARD WORKING & WORKING HARD?

Technical Data 参数			SQTB 200	SQTB 350	SQTB 500	SQTB 600
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : C0₂			200A	350A	500A	600A
Rating: Mixed Gas 混合气体			180A	300A	420A	500A
Duty Cycle: 暂载率			60%	60%	60%	35%
Wire Size: 焊丝直径			0.8-1.2	1.0-1.4	1.2-1.6	1.2-1.6
Order Part No.	PNA FITTING	3M	SQTB 200-3K	SQTB 350-3K	SQTB 500-3K	SQTB 600-3K
		4M	SQTB 200-4K	SQTB 350-4K	SQTB 500-4K	SQTB 600-4K
		5M	SQTB 200-5K	SQTB 350-5K	SQTB 500-5K	SQTB 600-5K

SELEKT

BRD SNO / BRD SNB

MIG TORCHES

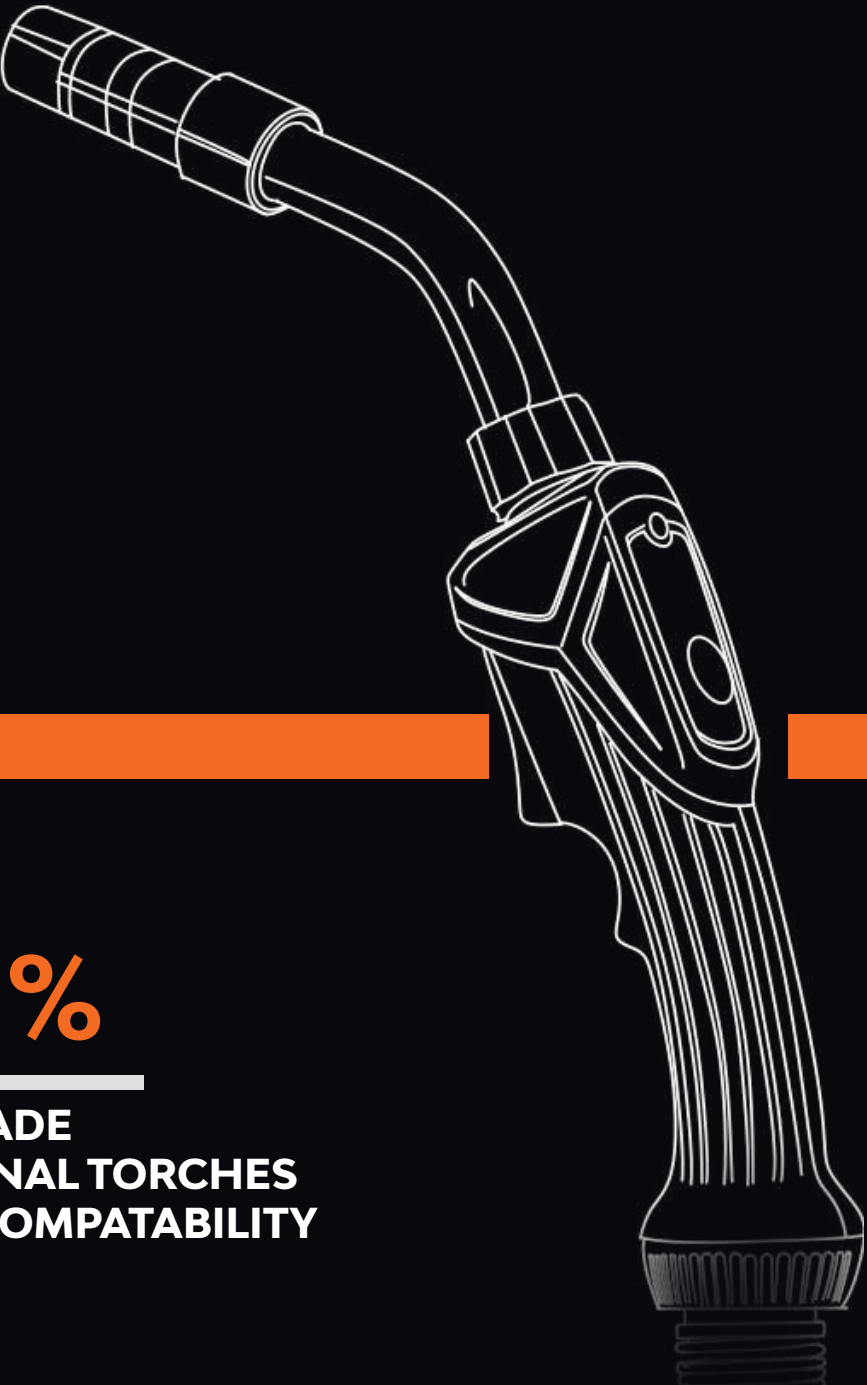

100%

QUALITY MADE
PROFESSIONAL TORCHES
BERNARD COMPATABILITY

CNC MACHINED CONSUMABLES PARTS

Designed to the same Quality & Specifications as OEM parts to ensure the best performance, longevity, and performance .



Available with
single and
double buttons
and with
potentiometer



Positive grip
trigger with long
life contacts.

Ergonomic,
lightweight and
solid handle
construction.

MACHINE END SYSTEMS


Smooth and consistent wire feed. Extra
length cable support systems.



Smooth
revolving ball
joint and steel
spring cable
support.



Heavy duty metal
jacket with high
conductivity
inner copper
tube.



**QUESTION : KNOW THE DIFFERENCE
HARD WORKING & WORKING HARD?**



Technical Data 参数			SNQ 200	SNQ 300	SNQ 400
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled
Rating : CO ₂			200A	300A	400A
Rating: Mixed Gas 混合气体			150A	200A	320A
Duty Cycle: 暂载率			60%	60%	60%
Wire Size: 焊丝直径			0.030"-0.045"(0.8-1.2)	0.030"-0.045"(0.8-1.2)	0.030"-1/16"(0.8-1.6)
Order Part No.	MILLER FITTING	10FT/3M	SNQ 200-10M	SNQ 300-10M	SNQ 400-10M
		12FT/3.6M	SNQ 200-12M	SNQ 300-12M	SNQ 400-12M
		15FT/4.5M	SNQ 200-15M	SNQ 300-15M	SNQ 400-15M
	EURO FITTING	10FT/3M	SNQ 200-10E	SNQ 300-10E	SNQ 400-10E
		12FT/3.6M	SNQ 200-12E	SNQ 300-12E	SNQ 400-12E
		15FT/4.5M	SNQ 200-15E	SNQ 300-15E	SNQ 400-15E

ANSWER : HAVING THE RIGHT TOOL.



Technical Data 参数			SNB 200	SNB 300	SNB 400
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled
Rating : CO ₂			200A	300A	400A
Rating: Mixed Gas 混合气体			150A	200A	320A
Duty Cycle: 暂载率			60%	60%	60%
Wire Size: 焊丝直径			0.030"-0.045"(0.8-1.2)	0.030"-0.045"(0.8-1.2)	0.030"-1/16"(0.8-1.6)
Order Part No.	MILLER FITTING	10FT/3M	SNB 200-10M	SNB 300-10M	SNB 400-10M
		12FT/3.6M	SNB 200-12M	SNB 300-12M	SNB 400-12M
		15FT/4.5M	SNB 200-15M	SNB 300-15M	SNB 400-15M
	EURO FITTING	10FT/3M	SNB 200-10E	SNB 300-10E	SNB 400-10E
		12FT/3.6M	SNB 200-12E	SNB 300-12E	SNB 400-12E
		15FT/4.5M	SNB 200-15E	SNB 300-15E	SNB 400-15E

SELEKT TWE MIG TORCHES



Available with
single and double
buttons and with
potentiometer

CNC machined
consumable
parts are 100%
interchangeable with
OEM MIG Torches

Ergonomic,
lightweight and
solid handle
construction.

Positive grip
trigger with long
life contacts.

Smooth revolving
ball joint and
steel spring cable
support.

Improved back
housing design
with more grip.

100%

QUALITY MADE
PROFESSIONAL TORCHES
TWE CO COMPATABILITY

AN ARRAY OF PRODUCTS FOR MAXIMUM VERSATILITY AND JOBS.

Designed to the same Quality & Specifications as OEM parts
to ensure the best performance, longevity, and performance .



Technical Data 参数	SNT1	SNT2	SNT4	SNT5
Cooling Method 冷却方式	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : CO ₂	180A	200A	400A	500A
Rating: Mixed Gas 混合气体	125A	150A	350A	400A
Duty Cycle: 暂载率	60%	60%	60%	60%
Wire Size: 焊丝直径	0.023"-0.045"(0.6-1.2)	0.023"-0.045"(0.6-1.2)	0.030"-5/64"(0.8-2.0)	0.035"-3/32"(0.9-2.4)

Order Part No.	EURO FITTING	10FT	SNT1-10E	SNT2-10E	SNT4-10E	SNT5-10E
		12FT	SNT1-12E	SNT2-12E	SNT4-12E	SNT5-12E
		15FT	SNT1-15E	SNT2-15E	SNT4-15E	SNT5-15E
	TWE CO FITTING	10FT	SNT1-10T	SNT2-10T	SNT4-10T	SNT5-10T
		12FT	SNT1-12T	SNT2-12T	SNT4-12T	SNT5-12T
		15FT	SNT1-15T	SNT2-15T	SNT4-15T	SNT5-15T
	LINCOLN FITTING	10FT	SNT1-10L	SNT2-10L	SNT4-10L	SNT5-10L
		12FT	SNT1-12L	SNT2-12L	SNT4-12L	SNT5-12L
		15FT	SNT1-15L	SNT2-15L	SNT4-15L	SNT5-15L
	MILLER FITTING	10FT	SNT1-10M	SNT2-10M	SNT4-10M	SNT5-10M
		12FT	SNT1-12M	SNT2-12M	SNT4-12M	SNT5-12M
		15FT	SNT1-15M	SNT2-15M	SNT4-15M	SNT5-15M

SELEKT TIG WELDING TORCHES



**ERGONOMIC,
LIGHTWEIGHT,
& DURABLE.**

100%

QUALITY MADE
PROFESSIONAL TORCHES

AN ARRAY OF PRODUCTS FOR MAXIMUM VERSATILITY AND JOBS.

Designed to the same Quality & Specifications as OEM parts
to ensure the best performance, longevity, and performance .

Standard
consumable Parts


New design
Improved torch body

Proprietary type
TPE and NYLON
blend handle

Pliable Handle offers great
user experience and access
in hard to reach places

Staggered knuckle
design for improved
welded mobility

NEW

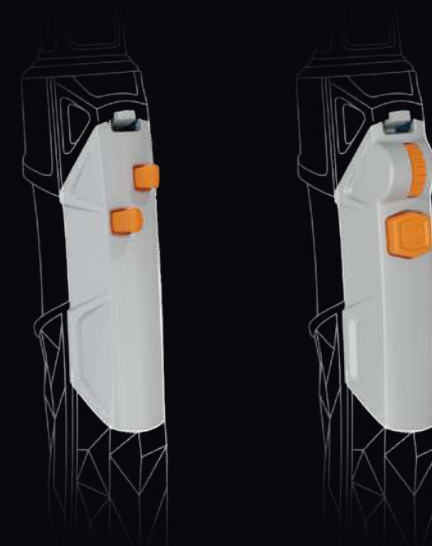

Various on
modules available

Unigue diamond
pattern design on
handle for solid grip
and feel

FULLY INTERGRATED TIG BACK END DESIGN

COMING SOON!



DROP YOUR DETAILS
WITH OUR SALES TEAM
AND KEEP INFORMED OF
RELEASE DATE

COOLING OPTIONS



Air
Cooling



Water
Cooling



Technical Data 参数	NST9	NST17	NST20	NST30	NST18	NST26
Cooling Method 冷却方式	Air-Cooled	Air-Cooled	Water-Cooled	Water-Cooled	Water-Cooled	Air-Cooled
Rating : 额定电流 DC/AC	125A/100A	150A/125A	250A/180A	320A/230A	350A/270A	200A/150A
Duty Cycle: 暂载率	60%	60%	100%	100%	100%	60%
Electrodes Φ: 钨棒直径	0.5-1.6mm	0.5-2.4mm	0.5-3.2mm	0.5-3.2mm	0.5-4.0mm	0.5-3.2mm
Order Part No.						

Ready for action.....
whatever work throws at it

KLASIK

● BZL 欧式

N 15	43
N 15FE	43
N 24	43
N 25	43
N 26	43
N 36	44
N 40	44
N W-24	44
N W-501	44
NMT551	44

● PNA 松下式

QTB-200A	46
QTB-350A	46
QTB-500A	46
QTB-600A	46

● OTC OTC 式

QTB-200A	48
QTB-350A	48
QTB-500A	48

● NQ BRD NQ 式

NQ 200	50
NQ 300	50
NQ 400	50

● NB BRD NB 式

NB 200	52
NB 300	52
NB 400	52

● TWE TWE 式

NT 1	54
NT 2	54
NT 4	54
NT 5	54
NT 2B	54
NT 4B	54

● FLUX 自保护焊枪

NK 115	56
NK 126	56

● VALVE DIY 气阀式焊枪

QTB-100AF	58
QTB-90AF	58

● PUSHPULL 推拉丝焊枪

PG 4000/PW 5000	60
QTLB-24D/36D	60

● SPOOL 拉丝焊枪

QLBF-200 III	62
QLBF-185	62
QTLB-24D/36D-SP	62

NEW

● MIG FUME 环保焊枪

NEG 353	64
NEG 503	64

NEW

● DUAL / DOUBLE WIRES 双丝焊枪

SZMW 500	66
SDW601	68

● TIG 氩弧焊枪

Range Overview	70
----------------	----

● PLASMA 等离子割枪

Range Overview	81
----------------	----

KLASIK



BZL MIG

TORCHES





IT'S ALL IN THE DETAILS!

DONT SACRAFICE COMFORT OVER PERFORMANCE

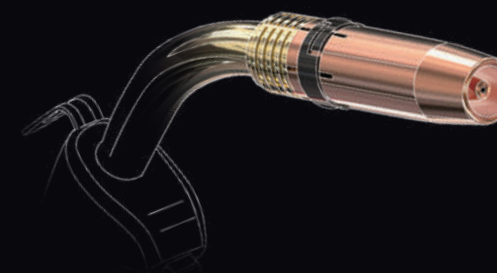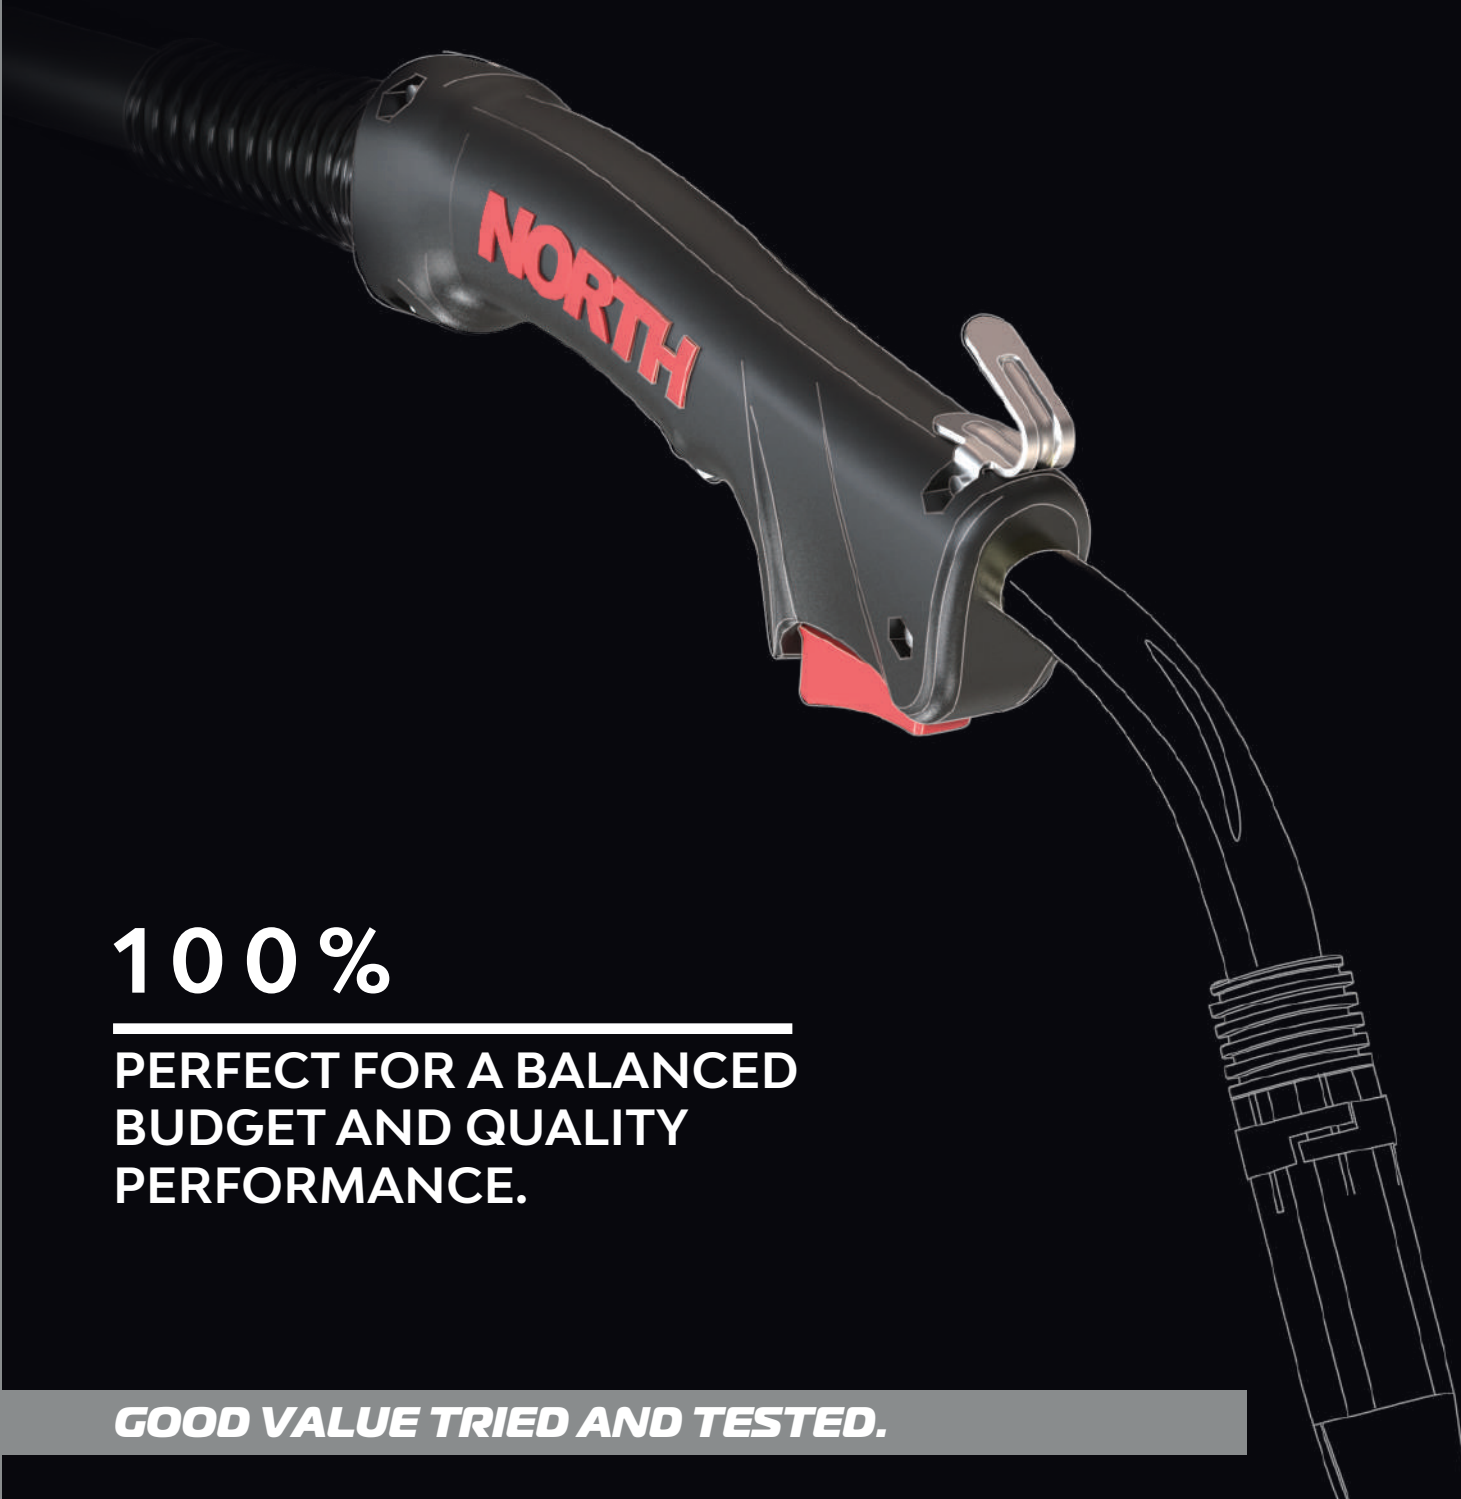

CNC machined consumable parts are 100% interchangeable with OEM Mig Torches.

Hanger Hook
Easy to locate

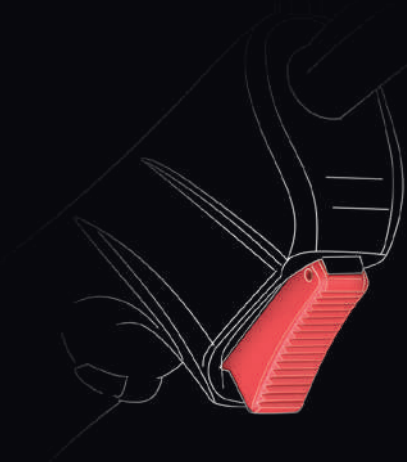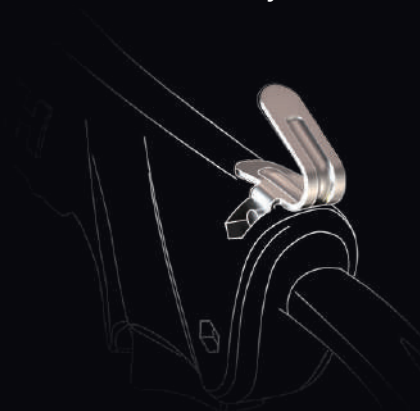

Positive grip trigger button with long life contacts.

Ergonomic,solid handle design



Cable supported by steel spring.

Heavy duty metal jacket with high conductivity inner copper tube.

100%

PERFECT FOR A BALANCED BUDGET AND QUALITY PERFORMANCE.

GOOD VALUE TRIED AND TESTED.



Technical Data 参数			N 15	N 15FE	N 24	N 25	N 26
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : C0 ₂			180A	180A	250A	230A	290A
Rating: Mixed Gas 混合气体			150A	150A	220A	200A	260A
Duty Cycle: 暂载率			60%	60%	60%	60%	60%
Wire Size: 焊丝直径			0.6-1.0	0.6-1.0	0.8-1.2	0.8-1.2	0.8-1.2
Order Part No.	EURO FITTING	3M	N15-3	N15FE-3	N24-3	N25-3	N26-3
		4M	N15-4	N15FE-4	N24-4	N25-4	N26-4
		5M	N15-5	N15FE-5	N24-5	N25-5	N26-5




N 36	N 40	NW-24	NW-501	NMT551
Air-Cooled	Air-Cooled	Water-Cooled	Water-Cooled	Water-Cooled
340A	350A	300A	500A	600A
300A	320A	270A	450A	550A
60%	60%	100%	100%	100%
0.8-1.6	1.0-2.4	0.8-1.2	1.0-1.6	1.0-1.6
N36-3	N40-3	NW24-3	NW-501E-3	NMT551-3
N36-4	N40-4	NW24-4	NW-501E-4	NMT551-4
N36-5	N40-5	NW24-5	NW-501E-5	NMT551-5

KLASIK

PNA MIG

TORCHES

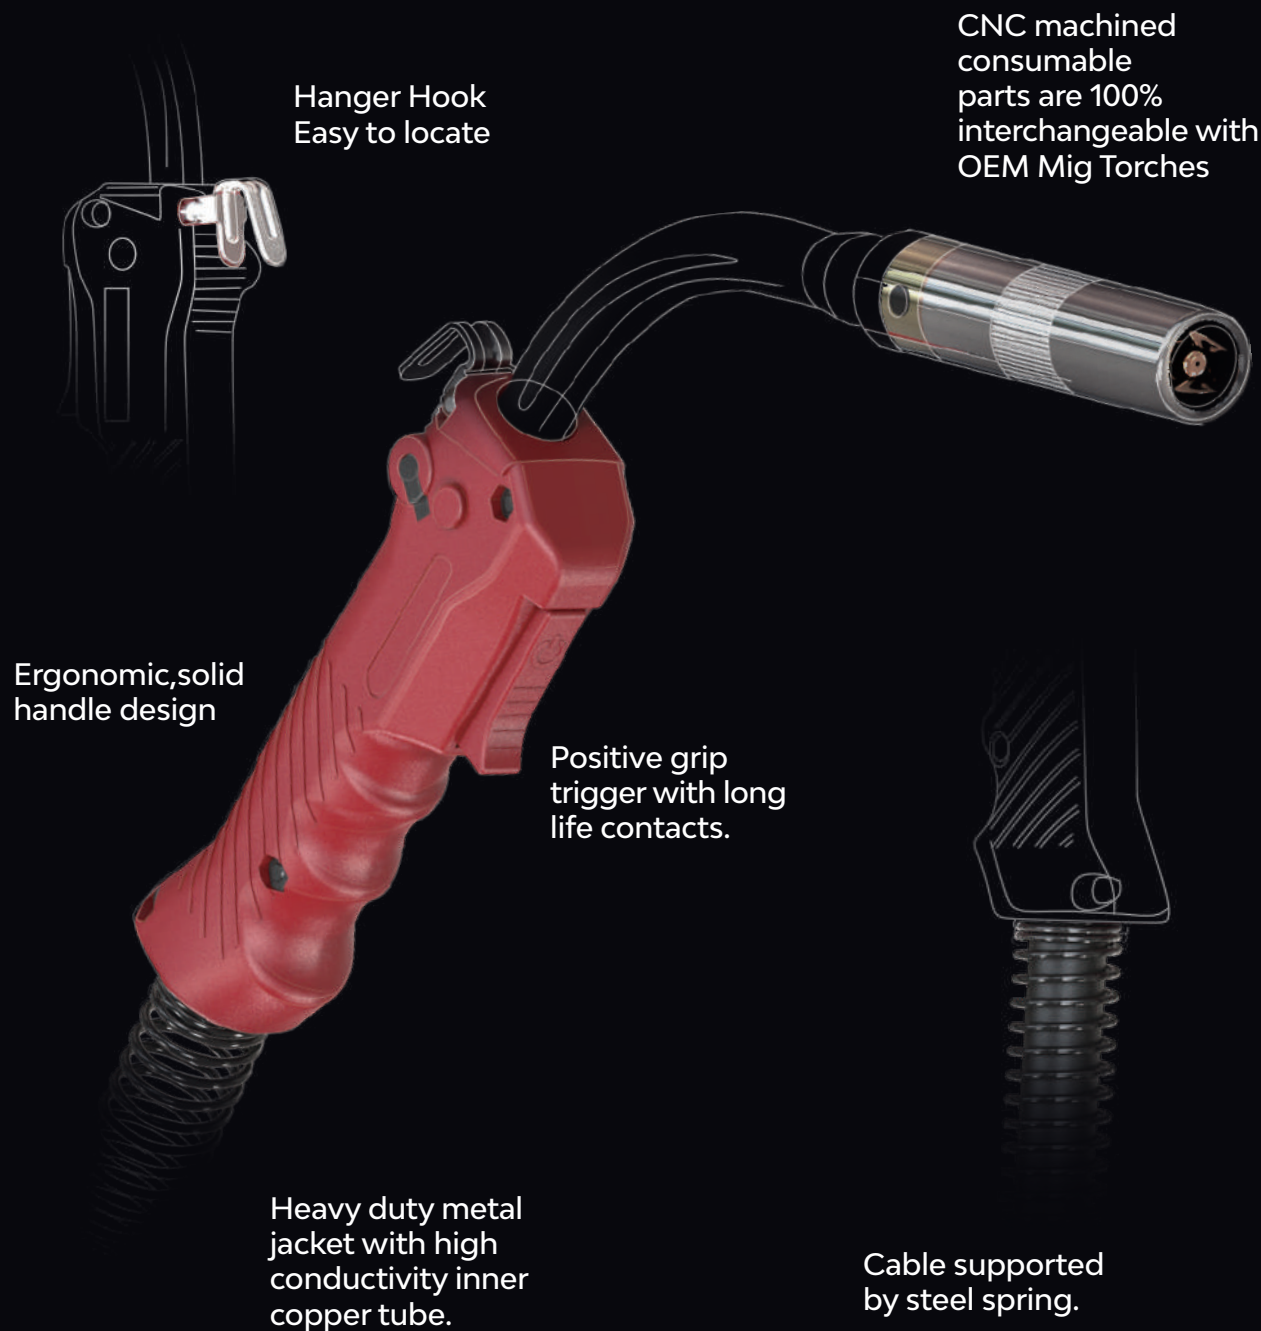

Technical Data 参数			QTB-200A	QTB-350A	QTB-500A	QTB-600A
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : CO₂			200A	350A	500A	600A
Rating: Mixed Gas 混合气体			180A	300A	420A	500A
Duty Cycle: 暂载率			60%	60%	60%	35%
Wire Size: 焊丝直径			0.8-1.2	1.0-1.4	1.2-1.6	1.2-2.0
Order Part No.	PNA FITTING	3M	NS-200K-3	NS-350K-3	NS-500K-3	NS-600K-3
		4M	NS-200K-4	NS-350K-4	NS-500K-4	NS-600K-4
		5M	NS-200K-5	NS-350K-5	NS-500K-5	NS-600K-5

GOOD VALUE TRIED AND TESTED.

KLASIK

OTC MIG

TORCHES



Heavy duty metal jacket with high conductivity inner copper tube.

Ergonomic, solid handle design

Cable supported by steel spring.

Positive grip trigger with long life contacts.

CNC machined consumable parts are 100% interchangeable with OEM Mig Torches



Technical Data 参数			OTB-200A	OTB-300A	OTB-500A
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled
Rating : CO ₂			200A	350A	500A
Rating: Mixed Gas 混合气体			180A	300A	420A
Duty Cycle: 暂载率			60%	60%	60%
Wire Size: 焊丝直径			0.8-1.2	1.0-1.4	1.2-1.6
Order Part No.	OTC FITTING	3M	ND-200D-3	ND-350D-3	ND-500D-3
		4M	ND-200D-4	ND-350D-4	ND-500D-4
		5M	ND-200D-5	ND-350D-5	ND-500D-5

GOOD VALUE TRIED AND TESTED.

KLASIK

BRD NQ

MIG TORCHES



CNC machined consumable parts are 100% interchangeable with OEM Mig Torches

Ergonomic, solid handle design

Positive grip trigger with long life contacts.

Cable supported by steel spring.

Heavy duty metal jacket with high conductivity inner copper tube.



GOOD VALUE TRIED AND TESTED.

Technical Data 参数			NQ 200	NQ 300	NQ 400
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled
Rating : CO ₂			200A	300A	400A
Rating: Mixed Gas 混合气体			150A	200A	320A
Duty Cycle: 暂载率			60%	60%	60%
Wire Size: 焊丝直径			0.030"-0.045"(0.8-1.2)	0.030"-0.045"(0.8-1.2)	0.030"-1/16"(0.8-1.6)
Order Part No.	EURO FITTING	10FT/3M	NQ 200-10	NQ 300-10	NQ 400-10
		12FT/3.6M	NQ 200-12	NQ 300-12	NQ 400-12
		15FT/4.5M	NQ 200-15	NQ 300-15	NQ 400-15

KLASIK

BRD NB

MIG TORCHES



Hanger Hook
Easy to locate

CNC machined
consumable parts are
100% interchangeable
with OEM Mig Torches

Ergonomic,solid
handle design

Positive grip
trigger with long
life contacts.

Cable supported
by steel spring.

Heavy duty metal
jacket with high
conductivity inner
copper tube.

GOOD VALUE TRIED AND TESTED.



Technical Data 参数			NB 200	NB 300	NB 400
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled
Rating : C0₂			200A	300A	400A
Rating: Mixed Gas 混合气体			150A	200A	320A
Duty Cycle: 暂载率			60%	60%	60%
Wire Size: 焊丝直径			0.030"-0.045"(0.8-1.2)	0.030"-0.045"(0.8-1.2)	0.030"-1/16"(0.8-1.6)
Order Part No.	EURO FITTING	10FT/3M	NB 200-10	NB 300-10	NB 400-10
		12FT/3.6M	NB 200-12	NB 300-12	NB 400-12
		15FT/4.5M	NB 200-15	NB 300-15	NB 400-15

KLASIK TWE MIG TORCHES



CNC machined consumable parts are 100% interchangeable with OEM Mig Torches

Hanger Hook
Easy to locate

Ergonomic, solid
handle design

Positive grip
trigger with long
life contacts.

Heavy duty metal
jacket with high
conductivity inner
copper tube.

Cable supported
by steel spring.

GOOD VALUE TRIED AND TESTED.



Technical Data 参数	NT 1	NT 2	NT 4	NT 5	NT 2B	NT 4B
Cooling Method 冷却方式	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : CO ₂	180A	200A	400A	500A	200A	400A
Rating: Mixed Gas 混合气体	125A	150A	350A	400A	150A	350A
Duty Cycle: 暂载率	60%	60%	60%	60%	60%	60%
Wire Size: 焊丝直径	0.023"-0.045" (0.6-1.2)	0.023"-0.045" (0.6-1.2)	0.030"-5/64" (0.8-2.0)	0.035"-3/32" (0.9-2.4)	0.023"-0.045" (0.6-1.2)	0.030"-5/64" (0.8-2.0)

Order Part No.	EURO FITTING	3M	NT1-3E	NT2-3E	NT4-3E	NT5-3E	NT2B-3E	NT4B-3E
		4M	NT1-4E	NT2-4E	NT4-4E	NT5-4E	NT2B-4E	NT4B-4E
		5M	NT1-5E	NT2-5E	NT4-5E	NT5-5E	NT2B-5E	NT4B-5E
	TWECO FITTING	3M	NT1-3T	NT2-3T	NT4-3T	NT5-3T	NT2B-3T	NT4B-3T
		4M	NT1-4T	NT2-4T	NT4-4T	NT5-4T	NT2B-4T	NT4B-4T
		5M	NT1-5T	NT2-5T	NT4-5T	NT5-5T	NT2B-5T	NT4B-5T
	LINCOLN FITTING	3M	NT1-3L	NT2-3L	NT4-3L	NT5-3L	NT2B-3L	NT4B-3L
		4M	NT1-4L	NT2-4L	NT4-4L	NT5-4L	NT2B-4L	NT4B-4L
		5M	NT1-5L	NT2-5L	NT4-5L	NT5-5L	NT2B-5L	NT4B-5L
	MILLER FITTING	3M	NT1-3M	NT2-3M	NT4-3M	NT5-3M	NT2B-3M	NT4B-3M
		4M	NT1-4M	NT2-4M	NT4-4M	NT5-4M	NT2B-4M	NT4B-4M
		5M	NT1-5M	NT2-5M	NT4-5M	NT5-5M	NT2B-5M	NT4B-5M

KLASIK FLUX TORCHES



CNC machined consumable parts are 100% interchangeable with OEM Flux Torches

Original long life OMRON switch.

Heavy duty metal jacket with high conductivity inner copper tube.

Solid handle with protective aluminium heatshield.

Cable supported by steel spring.

GOOD VALUE TRIED AND TESTED.



Technical Data 参数		NK 126	NK 115
Rating : 电流		350A	450A
Duty Cycle: 暂载率		60%	60%
Wire Size: 焊丝直径		0.035"-3/32" (0.9-2.4)	5/64"-0.120" (2.0-3.0)
Order Part No.	3M	LINER REPLACEABLE	NK-350R-3
		C/W ATTENUATING SWITCH, LINER REPLACEABLE	NK-350RS-3
		LINER NON-REPLACEABLE	NK-350-3
		C/W ATTENUATING SWITCH, LINER NON-REPLACEABLE	NK-350S-3
			NK-450R-3
			NK-450RS-3
			NK-450-3
			NK-450S-3

KLASIK VALVE TORCHES



Hanger Hook
Easy to locate

CNC machined
consumable parts are
100% interchangeable
with OEM Mig Torches

Ergonomic,solid
handle design

Positive grip
trigger with long
life contacts.

Heavy duty metal
jacket with high
conductivity inner
copper tube.

Cable supported
by steel spring.

GOOD VALUE TRIED AND TESTED.



Technical Data 参数			QT8-90AF	QT8-100AF
Cooling Method			Air-Cooled	Air Cooled
Rating: Mixed Gas 混合气体			90A	100A
Duty Cycle: 暂载率			35%	35%
Wire Size: 焊丝直径			0.6-1.0	0.6-1.0
Order Part No.	EURO GUN NECK	2.5M	NV-90E-2.5	NVA-100E-2.5
		3M	NV-90E-3	NVA-100E-3
	TWECO GUN NECK	2.5M	NV-90T-2.5	NVA-100T-2.5
		3M	NV-90T-3	NVA-100T-3

KLASIK

PUSHPULL TORCHES




Technical Data 参数	PG 4000/PW5000	QTLB-24D/36D
Cooling Method 冷却方式	Air/Water-Cooled	Air-Cooled
Rating : C0 ₂	400/500A	200/350A
Rating: Mixed Gas 混合气体	350/400A	160/300A
Duty Cycle: 暂载率	40%/100%	60%
Wire Size: 焊丝直径	0.8-1.2/1.6	0.8-1.2

Order Part No.	6M	0° NECK	PG 4000-6	PW 5000-6	QTLB-24D-6	QTLB-36D-6
		45° NECK	PG 4045-6	PW 5045-6	QTLB-24D45-6	QTLB-36D45-6
	8M	0° NECK	PG 4000-8	PW 5000-8	QTLB-24D-8	QTLB-36D-8
		45° NECK	PG 4045-8	PW 5045-8	QTLB-24D45-8	QTLB-36D45-8

GOOD VALUE TRIED AND TESTED.

KLASIK

SPOOL TORCHES

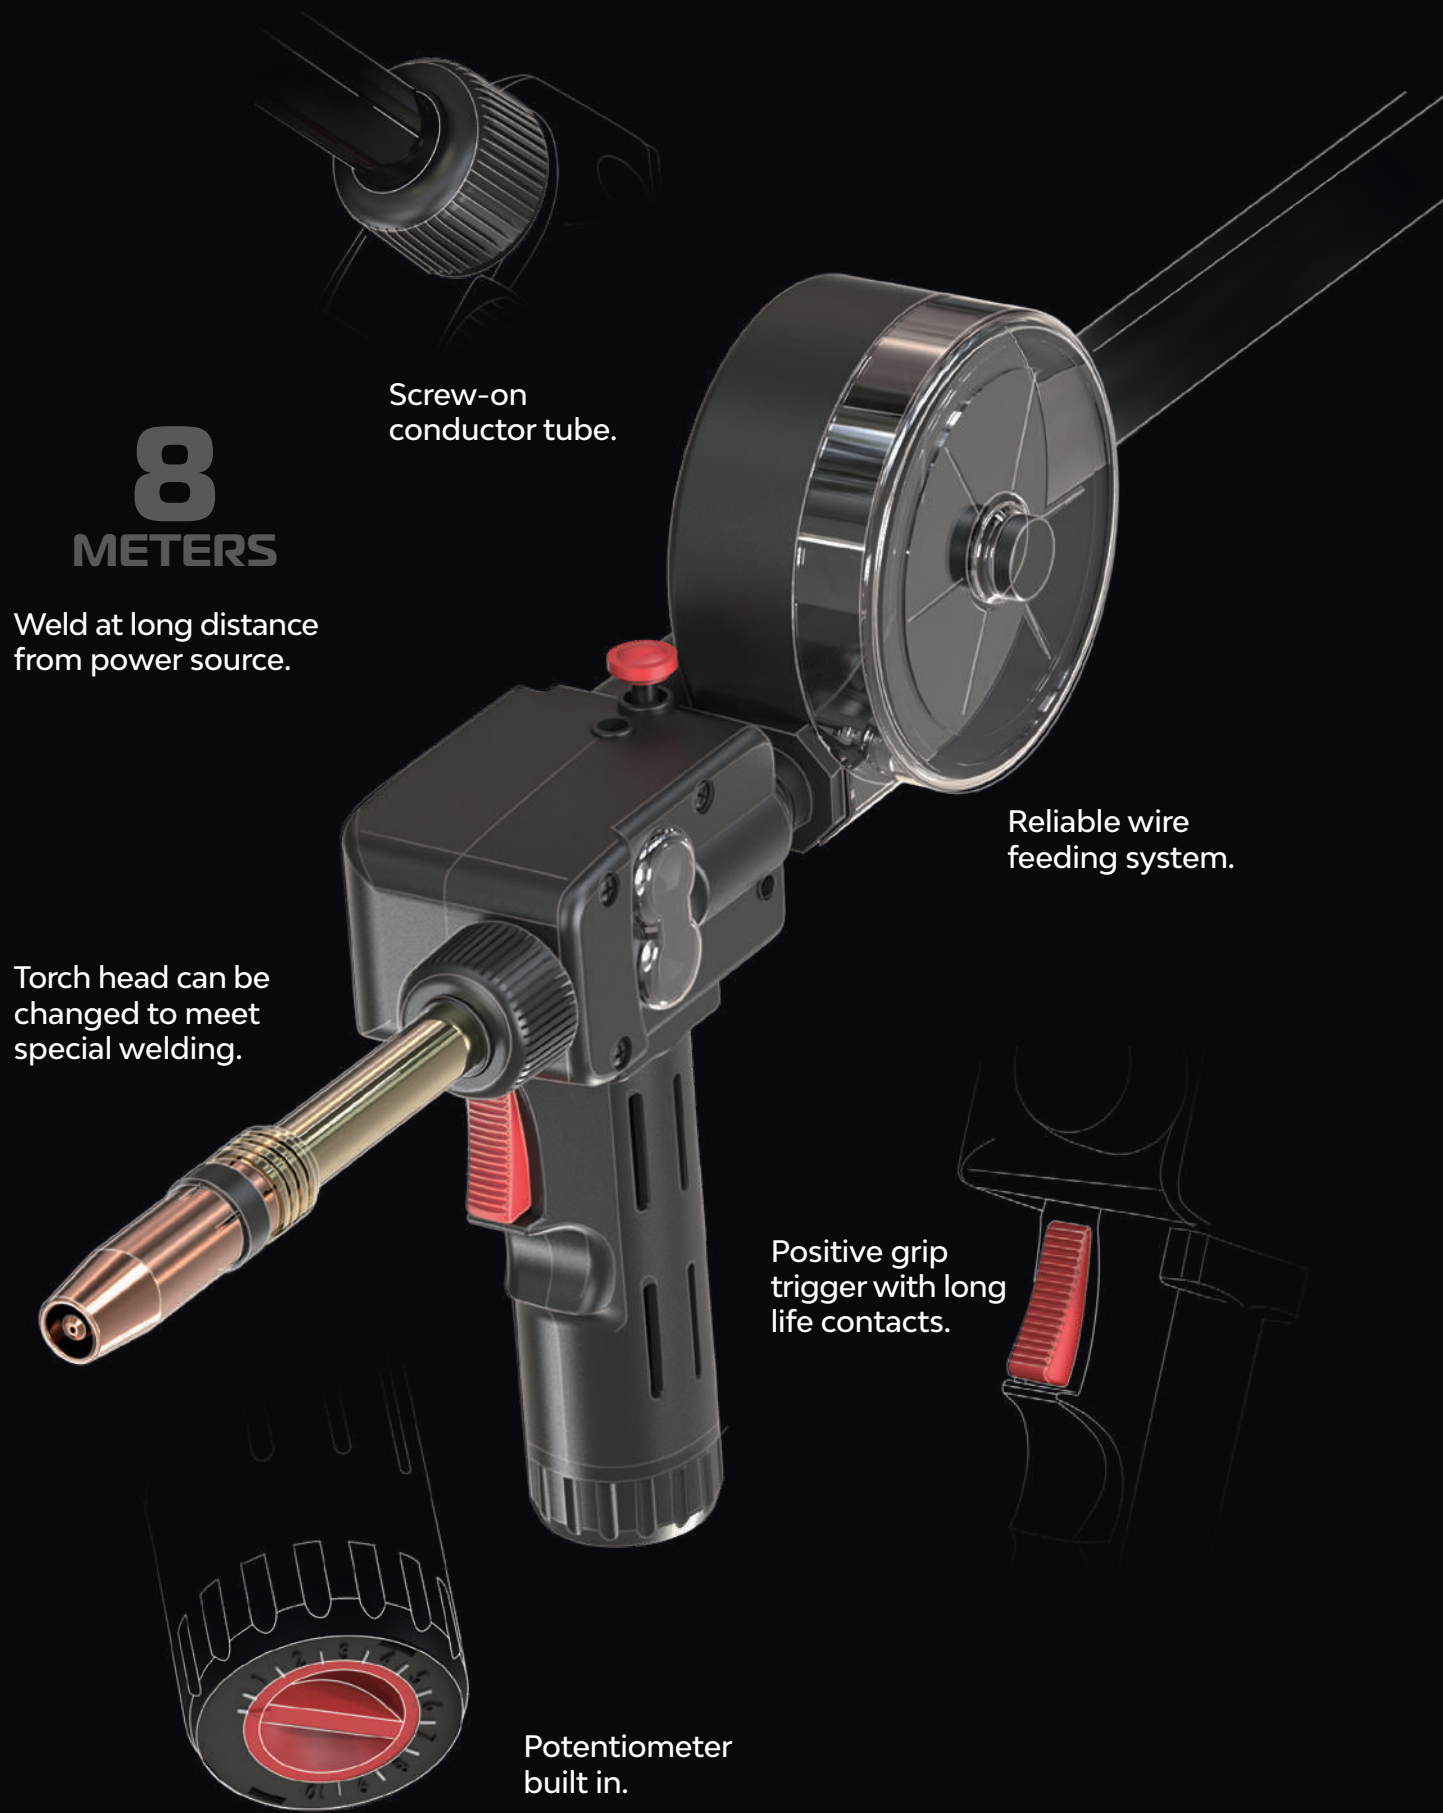

Technical Data 参数			QLBF-200 III	QLBF-185	QTLB -24D/36D-SP	
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled	
Rating : CO ₂			200A	180A	200/350A	
Rating: Mixed Gas 混合气体			160A	160A	160/300A	
Duty Cycle: 暂载率			60%	60%	60%	
Wire Size: 焊丝直径			0.6-1.0	0.8-0.9	0.6/0.8-1.2	
Order Part No.	EURO FITTING	6M	QLBF-200 III-6E		QTLB-24D-SP-6E	QTLB-36D-SP-6E
		8M	QLBF-200 III-8E		QTLB-24D-SP-8E	QTLB-36D-SP-8E
	TWECO FITTING	6M	QLBF-200 III-6T		QTLB-24D-SP-6T	QTLB-36D-SP-6T
		8M	QLBF-200 III-8T		QTLB-24D-SP-8T	QTLB-36D-SP-8T
	4 PIN PLUG	6M	QLBF-185-6			
	φ13MM HOLE LUG 5MM ID HOSE	8M	QLBF-185-8			

GOOD VALUE TRIED AND TESTED.

KLASIK MIG/MAG FUME TORCHES



NEW



Technical Data 参数	NEG 353	NEG 503
Cooling Method 冷却方式	Air-Cooled	Air-Cooled
Rating : CO ₂	350A	500A
Rating: Mixed Gas 混合气体	300A	420A
Duty Cycle: 暂载率	60%	60%
Wire Size: 焊丝直径	1.0-1.4	1.2-1.6

NO FUME.... ONLY CLEAN AIR.

KLASIK DUAL WIRE TORCH

NEW



Easy On-Off
neck removal
and replacement

Reduced nozzle
weight via
aluminum alloy
head

Easy T-Handle torch
conversion via a
quick click On-Off

Heavy duty
performance via
independently
water cooled
wire lines



Technical Data 参数	SZMW500
Cooling Method 冷却方式	Water-Cooled
Rating : CO ₂	500A
Rating: Mixed Gas 混合气体	400A
Duty Cycle: 暂载率	100%
Wire Size: 焊丝直径	1.0-1.6

GOOD VALUE TRIED AND TESTED.

KLASIK DOUBLE WIRES TORCH

NEW



20% - 30%

**EFFICIENCY IMPROVEMENT
COMPARED TO SINGLE WIRE**

GOOD VALUE TRIED AND TESTED.



Technical Data 参数	SDW601
Cooling Method 冷却方式	Water-Cooled
Rating : CO ₂	600A
Rating: Mixed Gas 混合气体	500A
Duty Cycle: 暂载率	100%
Wire Size: 焊丝直径	1.0-1.2

*Ready for action.....
I'm beading the competition*

● **KLASIK Range** KLASIK 系列氩弧焊枪

KT 9	72
KT 17	72
KTW 18	72
KTW 18SC	72
KTW 20	72
KT 24	73
KTW 24	73
KTW 25	73
KT 26	73
KT H 17	74
KT HW 18	74
KT H 26	74


● **WP RANGE** WP 系列氩弧焊枪

WP 9	77
WP 17	77
WP 18	77
WP 20	77
WP 24	78
WP 24W	78
WP 25	78
WP 26	78
WP 12	78
TIG 150	79
TIG 300	79
WP 22	80
WP 27	80

KLASIK TIG WELDING



TORCHES

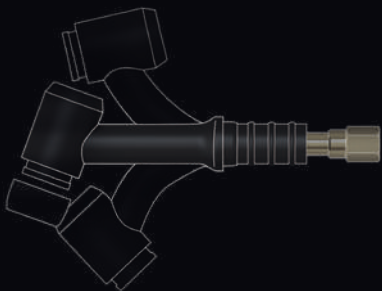


Available in
standard and
flexible body with/
without valves.


Consumable
parts are 100%
interchangeable with
OEM MIG Torches

Ergonomic,
lightweight and solid
handle construction.

Smooth revolving
ball joint

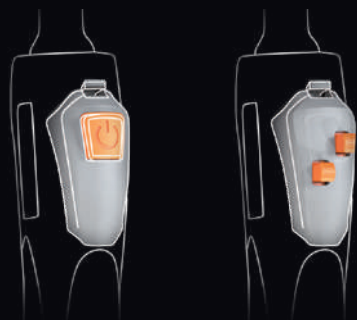

Torch Control Module Options

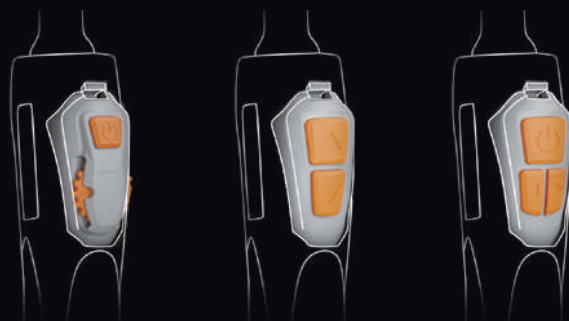

PERFECT FOR A BALANCED
BUDGET AND QUALITY
PERFORMANCE.

GOOD VALUE TRIED AND TESTED.

Technical Data 参数	KT 9	KT 17	KTW 18	KTW 18SC	KTW 20
Cooling Method 冷却方式	Air-Cooled	Air-Cooled	Water-Cooled	Water-Cooled	Water-Cooled
Rating : 额定电流 DC/AC	125A/100A	150A/125A	350A/270A	400A/280A	250A/180A
Duty Cycle: 暂载率	60%	60%	100%	100%	100%
Electrodes Φ : 钨棒直径	0.5-1.6mm	0.5-2.4mm	0.5-4.0mm		0.5-3.2mm
Order Part No.	4M NSA1407	NSF1407	NSR1407	NSR1407SC	NSU1407



KLASIK

TIG WELDING

TORCHES



Technical Data 参数		KT 24	KTW 24	KTW 25	KT 26
Cooling Method 冷却方式		Air-Cooled	Water-Cooled	Water-Cooled	Air-Cooled
Rating : 额定电流 DC/AC		110A/95	180A/120A	250A/220A	200A/150A
Duty Cycle: 暂载率		60%	100%	100%	60%
Electrodes Φ : 钨棒直径		0.5-2.4mm	0.5-2.4mm	0.5-3.2mm	0.5-3.2mm
Order Part No.	4M	NSP1407	NSY1407	NSW1407	NSK1407



Technical Data 参数		KTH 17	KTHW 18	KTH 26
Cooling Method 冷却方式		Air-Cooled	Water-Cooled	Air-Cooled
Rating : 额定电流 DC/AC		150A/125A	350A/270A	200A/150A
Duty Cycle: 暂载率		60%	100%	60%
Electrodes Φ : 钨棒直径		0.5-2.4mm	0.5-4.0mm	0.5-4.0mm
Order Part No.	4M	NSF4427-K	NSR4427-K	NSK4427-K

KLASIK TIG WELDING



TORCHES

**RUGGED
TUBE DESIGN,
LIGHTWEIGHT, &
DURABLE.**

**PERFECT FOR A BALANCED
BUDGET AND QUALITY
PERFORMANCE.**

GOOD VALUE TRIED AND TESTED.

IT'S ALL IN THE DETAILS!

**DONT SACRAFICE COMFORT OVER
PERFORMANCE**

Consumable
parts are 100%
interchangeable with
OEM MIG Torches

Traditional
trigger fitted

Available in
standard and
flexible body with/
without valves.

Very flexible rubber
cables with a high
insulation level.

Connections for all
types of welding
machines.



KLASIK

TIG WELDING

TORCHES



Technical Data 参数		WP 9	WP 17	WP 18	WP 20
Cooling Method 冷却方式		Air-Cooled	Air-Cooled	Water-Cooled	Water-Cooled
Rating : 额定电流 DC/AC		125A/100A	150A/125A	350A/270A	250A/180A
Duty Cycle: 暂载率		60%	60%	100%	100%
Electrodes Φ: 钨棒直径		0.5-1.6mm	0.5-2.4mm	0.5-4.0mm	0.5-3.2mm
Order Part No.	4M	NSA1401	NSF1401	NSR1401	NSU1401



Technical Data 参数		WP 24	WP 24W	WP 25	WP 26	WP 12
Cooling Method 冷却方式		Air-Cooled	Water-Cooled	Water-Cooled	Air-Cooled	Water-Cooled
Rating : 额定电流 DC/AC		110A/95	180A/120A	250A/220A	200A/150A	500A
Duty Cycle: 暂载率		60%	100%	100%	60%	100%
Electrodes Φ: 钨棒直径		0.5-2.4mm	0.5-2.4mm	0.5-3.2mm	0.5-4.0mm	1.6-6.4mm
Order Part No.	4M	NSP1401	NSY1401	NSW1401	NSK1401	NSWP1401



Technical Data 参数		TIG 150	TIG 300
Cooling Method 冷却方式		Air-Cooled	Air-Cooled
Rating : 额定电流 DC/AC		120A/80A	240A/160A
Duty Cycle: 暂载率		60%	60%
Electrodes Φ : 钨棒直径		1.6-2.4mm	1.6-3.2mm
Order Part No.	4M	STP4401	STP4411



Technical Data 参数		WP 22	WP 27
Cooling Method 冷却方式		Water-Cooled	Water-Cooled
Rating : 额定电流 DC/AC		250A/180A	500A/DC
Duty Cycle: 暂载率		100%	100%
Electrodes Φ : 钨棒直径		0.5-3.2mm	1.0-6.4mm
Order Part No.	4M	SYP1401	SNP1401-M

Ready for action.....
Cutting through thick and thin



KLASIK

● **NS Range** NS 系列低频等离子割枪
NO HF

NS 25	85
NS 25K	85
NS 35K	85
NS45	85
NS 65	86
NS 75	86
NS 80	86
NS 105	86
NS 125	86

● **NA Range** NA 系列高频等离子割枪
HF

NA 81	88
NA 101	88
NA 141	88
NA 151	88

● **CB Range** CB 系列高频等离子割枪
HF

CB 50	90
CB 70	90
CB 100	90
CB 150	90

● **NP Range** NP 系列高频等离子割枪
HF

PT 31	92
SG 55	92
AG 60	92
NP 80	92

● **NU Range** NU 系列低频等离子割枪
NO HF

NU 30K	94
NU 45	94

● **NSP Auto Range** NSP 系列低频自动等离子割枪
NO HF

NS 75P	96
NS 80P	96
NS 105P	96
NS 125P	96

● **NAP Auto Range** NAP 系列高频自动等离子割枪
HF

NA 81P	98
NA 101P	98
NA 141P	98
NA 151P	98

● **CBP Auto Range** CBP 系列高频自动等离子割枪
HF

CB 100P	100
CB 150P	100

● **NW Range** NW 系列高频等离子割枪
HF

NW 130P	102
NW 160P	102
NW 200P	102

HF

HF-High Frequency 高频等离子割枪

NO HF

NO HF-Without High Frequency 低频等离子割枪

KLASIK

NS Plasma

TORCHES



IT'S ALL IN THE DETAILS!

DONT SACRAFICE COMFORT OVER PERFORMANCE




**PERFECT FOR A BALANCED
BUDGET AND QUALITY
PERFORMANCE.**



CNC machined
consumables part and
aerospace polymers.

A mechanical lever
fitted to the trigger
for user safety.

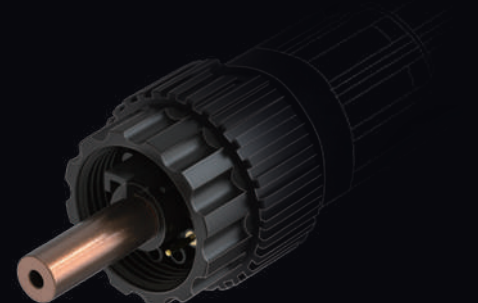

Comfortable
ergonomic handle.
100% quality virgin
material used.

Terminations are offered
in a "direct to machine"
or central connector
configuration.

Spiral design helps
support the cable and
offer great all day comfort
use.

GOOD VALUE TRIED AND TESTED.

KLASIK



NS Plasma

NO HF

TORCHES



Technical Data 参数	NS 25	NS 25K	NS 35K	NS 45
Cooling Method 冷却方式	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : 额定电流	25A	20A	32A	40A
Duty Cycle: 暂载率	60%	35%	35%	60%
Cutting Thickness: 切割厚度	6-8mm	4-6mm	6-8mm	8-12mm

Without High Frequency 低频等离子割枪

Order Part No.	1/4G	4M	NPA0411G	NPA0408G	NPA0409G	
		5M				
		6M				NPA0165G
	CENTRAL ADAPTOR	4M				
		5M				
		6M				NPA0166G



NS 65	NS 75	NS 80	NS 105	NS 125
Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
60A	70A 50A	80A 60A	100A 70A	120A 90A
60%	60% 100%	60% 100%	60% 100%	60% 100%
8-20mm	18-23mm	20-30mm	25-30mm	10-35mm

NPA2201G	NPA1606G	NPA8606G	NPA1654	NPA2251
NPA2200G	NPA1604G	NPA8604G	NPA1652	NPA2250

KLASIK

NA Plasma

TORCHES



PERFECT FOR A BALANCED
BUDGET AND QUALITY
PERFORMANCE.

HF



CNC machined
consumables part and
aerospace polymers.

Comfortable
ergonomic handle.
100% quality virgin
material used.

A mechanical lever
fitted to the trigger
for user safety.

Spiral design helps
support the cable and
offer great all day comfort
use.

Terminations are offered
in a "direct to machine"
or central connector
configuration.



Technical Data 参数	NA 81	NA 101	NA 141	NA 151
Cooling Method 冷却方式	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : 额定电流	80A 60A	100A 75A	140A 100A	150A 120A
Duty Cycle: 暂载率	60% 100%	60% 100%	60% 100%	60% 100%
Cutting Thickness: 切割厚度	20-25mm	25-30mm	35-40mm	35-40mm

High Frequency 高频等离子割枪

Order Part No.	1/4G	4M				
		5M				
		6M	NPA1404	NPA1454	NPA1502	NPA1552
	CENTRAL ADAPTOR	4M				
		5M				
		6M	NPA1402	NPA1452	NPA1504	NPA1554

GOOD VALUE TRIED AND TESTED.

Klasik

KLASIK

CB Plasma

TORCHES



PERFECT FOR A BALANCED
BUDGET AND QUALITY
PERFORMANCE.

HF



CNC machined
consumables part and
aerospace polymers.

Comfortable
ergonomic handle.
100% quality virgin
material used.

A mechanical lever
fitted to the trigger
for user safety.

Spiral design helps
support the cable and
offer great all day comfort
use.

Terminations are offered
in a "direct to machine"
or central connector
configuration.



GOOD VALUE TRIED AND TESTED.

Technical Data 参数	CB 50	CB 70	CB 100	CB 150
Cooling Method 冷却方式	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : 额定电流	50A 40A	70A 50A	100A 70A	150A 110A
Duty Cycle: 暂载率	60% 100%	60% 100%	60% 100%	60% 100%
Cutting Thickness: 切割厚度	10-15mm	18-24mm	24-30mm	35-40mm

High Frequency 高频等离子割枪

Order Part No.	1/4G	4M				
		5M				
		6M	NPA1301G	NPA1323G	NPA1351	NPA1371
	CENTRAL ADAPTOR	4M				
		5M				
		6M	NPA1302G	NPA1322G	NPA1352	NPA1372

KLASIK

NP Plasma

TORCHES



PERFECT FOR A BALANCED
BUDGET AND QUALITY
PERFORMANCE.

HF



Technical Data 参数		PT 31	SG 55	AG 60	NP 80
Cooling Method 冷却方式		Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : 额定电流		30A	60A	60A	80A
Duty Cycle: 暂载率		60%	60%	60%	60%
Cutting Thickness: 切割厚度		4-6mm	6-16mm	6-16mm	8-30mm
High Frequency 高频等离子割枪					
Order Part No.	1/4G	4M	NPA3102G	NPA6001G-A	NPA6001G-B
		5M			
	CENTRAL ADAPTOR	4M	NPA3104G		NPA6004G
		5M			NPA1113
	M16X1.5	4M			
		5M			NPA1110

GOOD VALUE TRIED AND TESTED.

KLASIK


NU Plasma

TORCHES



PERFECT FOR A BALANCED
BUDGET AND QUALITY
PERFORMANCE.

NO HF

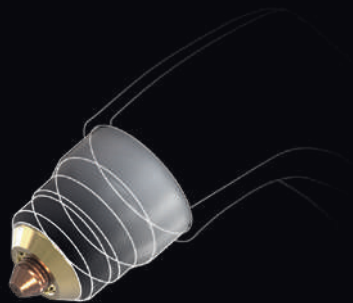

CNC machined
consumables part and
aerospace polymers.

Comfortable
ergonomic handle.
100% quality virgin
material used.

A mechanical lever
fitted to the trigger
for user safety.



Terminations are offered
in a "direct to machine"
or central connector
configuration.



Technical Data 参数	NU 35K	NU 45
Cooling Method 冷却方式	Air-Cooled	Air-Cooled
Rating : 额定电流	30A	40A
Duty Cycle: 暂载率	35%	60%
Cutting Thickness: 切割厚度	6-12mm	8-16mm

Without High Frequency 低频等离子割枪

Order Part No.	1/4G	4M	NPA0409U	
		5M		
		6M		NPA0165U
	CENTRAL ADAPTOR	4M		
		5M		
		6M		NPA0166U

GOOD VALUE TRIED AND TESTED.

KLASIK

NSP Plasma

TORCHES



PERFECT FOR A BALANCED
BUDGET AND QUALITY
PERFORMANCE.

NO HF



CNC machined consumables part and aerospace polymers.



Machine Solid tubular handle design.



Terminations are offered in a "direct to machine" or central connector configuration.

Heavy duty metal jacket with high conductivity inner copper tube.



Technical Data 参数	NS 75P	NS 80P	NS105P	NS 125P
Cooling Method 冷却方式	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : 额定电流	70A 50A	80A 60A	100A 70A	120A 90A
Duty Cycle: 暂载率	60% 100%	60% 100%	60% 100%	60% 100%
Cutting Thickness: 切割厚度	18-23mm	20-30mm	25-30mm	25-35mm

Without High Frequency 低频等离子割枪

Order Part No.	1/4G	4M				
		5M				
		6M	NPA1621	NPA8606P	NPA1684	NPA2261
	CENTRAL ADAPTOR	4M				
		5M				
		6M	NPA1620	NPA8604P	NPA1682	NPA2260

GOOD VALUE TRIED AND TESTED.

Klasik

KLASIK

NAP Plasma


TORCHES



CNC machined consumables part and aerospace polymers.




Machine Solid tubuler handle design.

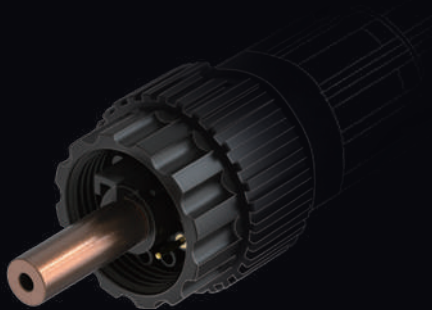

Terminations are offered in a "direct to machine" or central connector configuration.

Heavy duty metal jacket with high conductivity inner copper tube.

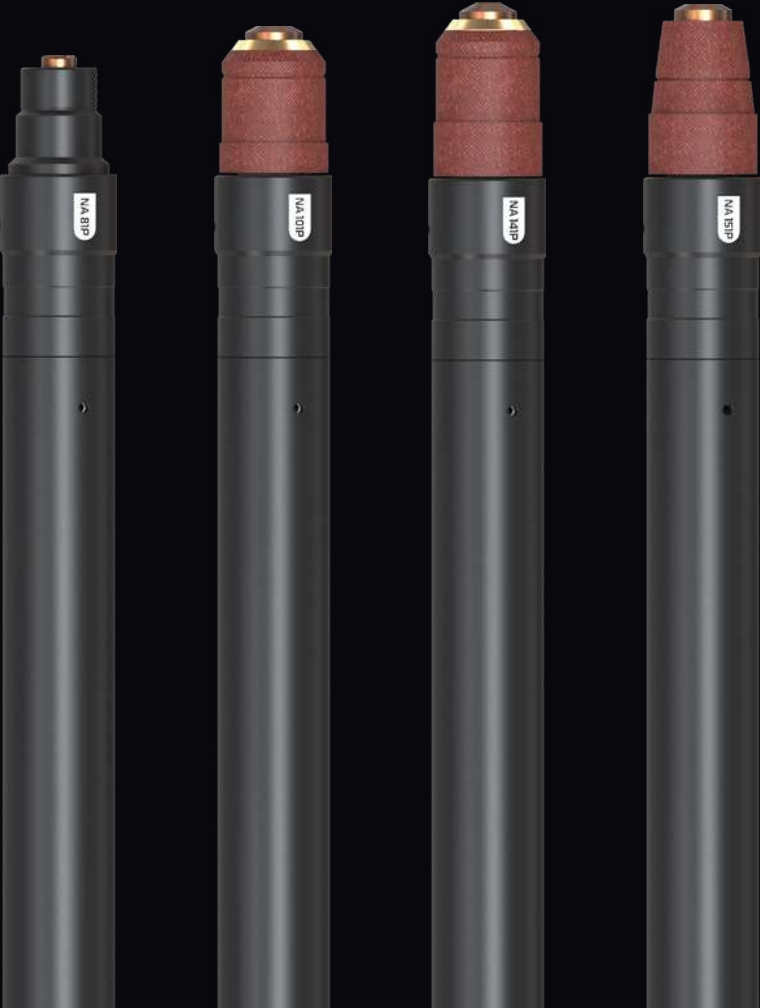

PERFECT FOR A BALANCED BUDGET AND QUALITY PERFORMANCE.

HF

GOOD VALUE TRIED AND TESTED.

Technical Data 参数	NA 81P	NA 101P	NA 141P	NA 151P
Cooling Method 冷却方式	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : 额定电流	80A 60A	100A 75A	140A 100A	150A 120A
Duty Cycle: 暂载率	60% 100%	60% 100%	60% 100%	60% 100%
Cutting Thickness: 切割厚度	20-25mm	25-30mm	35-40mm	35-40mm

High Frequency 高频等离子割枪

Order Part No.	1/4G	4M				
		5M				
		6M	NPA0180	NPA0110	NPA0103	NPA0127
	CENTRAL ADAPTOR	4M				
		5M				
		6M	NPA0181	NPA0111	NPA0145	NPA0128

KLASIK

CBP Plasma

TORCHES



CNC machined consumables part and aerospace polymers.



Machine Solid tubuler handle design.



Terminations are offered in a "direct to machine" or central connector configuration.

Heavy duty metal jacket with high conductivity inner copper tube.



PERFECT FOR A BALANCED BUDGET AND QUALITY PERFORMANCE.

HF

GOOD VALUE TRIED AND TESTED.

Technical Data 参数			CB 100P	CB 150P
Cooling Method 冷却方式			Air-Cooled	Air-Cooled
Rating : 额定电流			100A 70A	150A 110A
Duty Cycle: 暂载率			60% 100%	60% 100%
Cutting Thickness: 切割厚度			24-30mm	35-40mm
High Frequency 高频等离子割枪				
Order Part No.	1/4G	4M		
		5M		
		6M	NPA1216	NPA1219
	CENTRAL ADAPTOR	4M		
		5M		
		6M	NPA1284	NPA1285

KLASIK

NW Plasma

TORCHES




PERFECT FOR A BALANCED
BUDGET AND QUALITY
PERFORMANCE.

HF



CNC machined
consumables part and
aerospace polymers.


Machine
Solid tubuler
handle design.

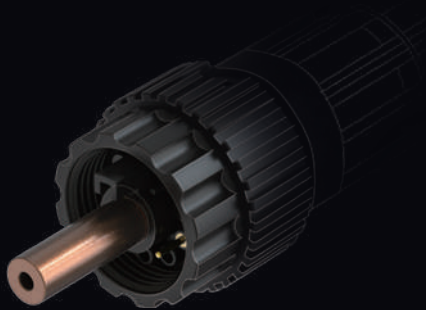

Terminations are offered
in a "direct to machine"
or central connector
configuration.

Cable supported
by steel spring.

Heavy duty metal jacket
with high conductivity
inner copper tube.

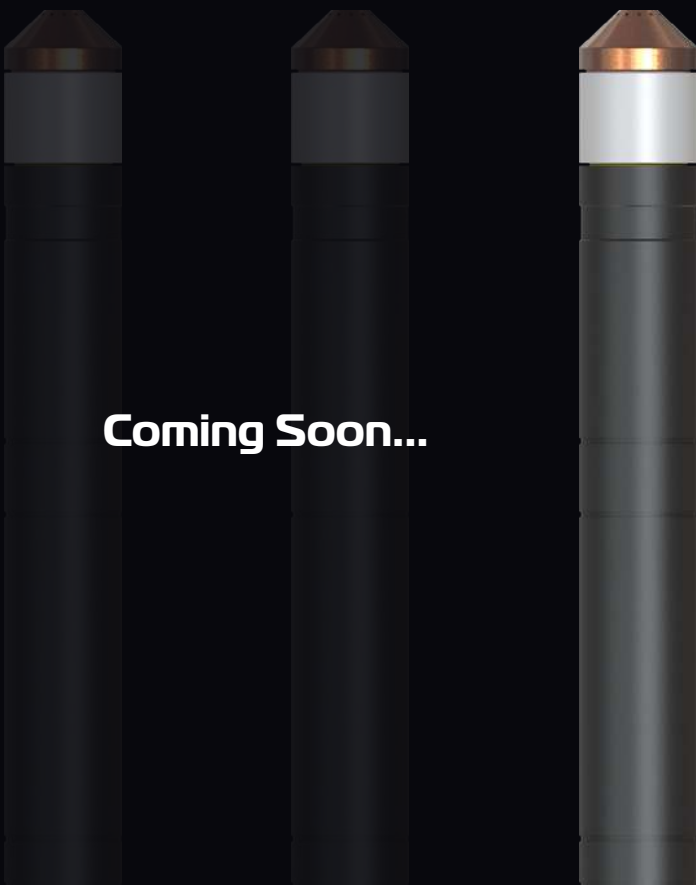

Coming Soon...

Technical Data 参数		NW 130P	NW 160P	NW200P
Cooling Method 冷却方式				Water-Cooled
Rating : 额定电流				200A
Duty Cycle: 暂载率				100%
Cutting Thickness: 切割厚度				30-75mm
High Frequency 高频等离子割枪				
Order Part No.		4M		
		5M		
		6M		NPA2000

GOOD VALUE TRIED AND TESTED.

Klasik

ACCESSORIES

Some sundry items....

For making your job easier

- **EARTH CLAMPS** 接地钳

29-001 Premium Earth Clamp 250Amp	106
29-002 Premium Earth Clamp 400Amp	106
29-003 Premium Earth Clamp 600Amp	106

- **ELECTRODE HOLDERS** 电焊钳

NEH250 Premium Electrode Holder 250Amp	106
NEH400 Premium Electrode Holder 400Amp	106
NEH600 Premium Electrode Holder 600Amp	106

- **MOULDED NON-CONDUCTIVE EARTH CLAMP** 接地钳

29-043	108
--------	-----

- **WELDING PLIERS** 焊接工具钳

WT-002	108
--------	-----

- **WORKSHOP STOOL** 焊接用椅

WT004	110
-------	-----

- **DINSE STYLE CABLE CONNECTORS** DINSE 电缆连接件

CX0020N/22N/25N/24N 200-500Amp	112
CX0040N/42N/43N/44N 200-500Amp	112

- **CABLE CONNECTORS 500 AMP** 电缆连接件

29-044	112
29-022	112

- **DINSE STYLE CONNECTORS**
DINSE 连接件

CX0020/21/22/25/24 200-500Amp Male	114
CX0040/41/42/43/44 200-500Amp Female	114

- **DINSE STYLE PANEL SOCKET**
DINSE 连接件

CX0010/72/73 200-500Amp Male	114
CX0030/58 200-400Amp Female	114
CX0012/13 400-500Amp Male	114
CX0031/32/59 400-500Amp Female	114

- **TIG DINSE STYLE ADAPTORS**

LDT1820L	115
DT-5058	116

- **DINSE STYLE ADAPTORS** DINSE 连接座

LD1076	115
LD1076F	115
LDA	115
LD1076L	115

- **TIG ADAPTOR**

PCA 2	116
45V11	116

- **MEASUREMENT GAUGE**

29-039	117
--------	-----


EARTH CLAMPS



Heavy plate construction, nickel plated for rust prevention.
结构加强，镀镍防锈。



High force holding spring.
高强度弹簧。



Heavy copper plated jaws and construction.
重型镀铜咬合结构。



Quality brass braid.
高质量编织铜。



Brass machined hard-wear components.
高耐磨性黄铜部件。



Technical Data 参数	29-001	29-002	29-003
Rating 电流	200A 260A 300A	400A 500A	600A 785A
Duty Cycle 暂载率	60% 35% 25%	60% 35%	60% 35%
Mounting Stud 螺钉	M8	M10	M10
Cable Size 电缆	UP TO 25mm ²	UP TO 70mm ²	UP TO 95mm ²
Jaws Opening Height 最大口径	38mm	63mm	76mm
Jaws Opening Depth 最大进深	63mm	76mm	76mm

ELECTRODE HOLDERS



Custom engineered PA blend of materials
专用工业 PA 混合材料。



Custom engineered Phenolic blend of materials.
专用工业酚醛混合材料。。



Hang hook.
挂钩结构。



Forged brass and precision machined.
锻造黄铜精密加工，。



Hardened grab lever.
更可靠的压紧结构。



CNC machined components.
高质量配件。



Standard compliant.
符合 AS/IEC 60974-11 标准



Technical Data 参数	NEH250	NEH400	NEH600
Rating 电流	200A 250A	300A 400A	350A 600A
Duty Cycle 暂载率	60% 35%	60% 35%	60% 25%
Electrode Size 焊条	1.6-5mm	1.6-6.3mm	2-6.3mm
Cable Size 电缆	25-35mm ²	50-70mm ²	70-95mm ²
Standard 标准	AS/IEC 60974-11	AS/IEC 60974-11	AS/IEC 60974-11

MOULDED NON-CONDUCTIVE EARTH CLAMP



Grooved jaw design ensures firm electrode grip



Solid construction



Fully insulated, high strength spring for excellent gripping power



Hardwear components included



Heavy duty, shock proof nylon handle



Technical Data 参数	29-043
Rating 电流	180 Amp
Weight 重量	200 grams
Jaws Opening Height 最大口径	51mm
Type of Cable Connection 连接方式	Bolt and Nut with support

WELDING PLIERS



Hammering



Spring Loaded for easy opening and closing



Wire cutting



Nozzle removal and installation



Tip removal and installation



Wire drawing Out



Spatter removal from inside the nozzle



Part No. 零件号	WT-002
--------------	--------

WORKSHOP STOOL



Height adjustable.
高度可调节。



Comfort seat contoured to your body. Holes provide consistent air movement for sweat free use.
人体工程学设计，使用更舒适。



Keep your working tools close to you; for convenience tool tray included.
工具托盘保证工具随手可得。



Nylon swivel wheels. Roll around un-im-peded for access free work.
万向轮保证工作随心所欲。




Quality steel, powder coated/ zinc plated for long term rust protection.
优质钢材，粉末喷涂 / 镀锌，长期防锈。



Technical Data 参数	WT004
Min Adjustment Height 最小调节高度	400mm
Max Adjustment Height 最大调节高度	560mm
Capacity 载重	150KG

DINSE STYLE CABLE CONNECTORS


NEW

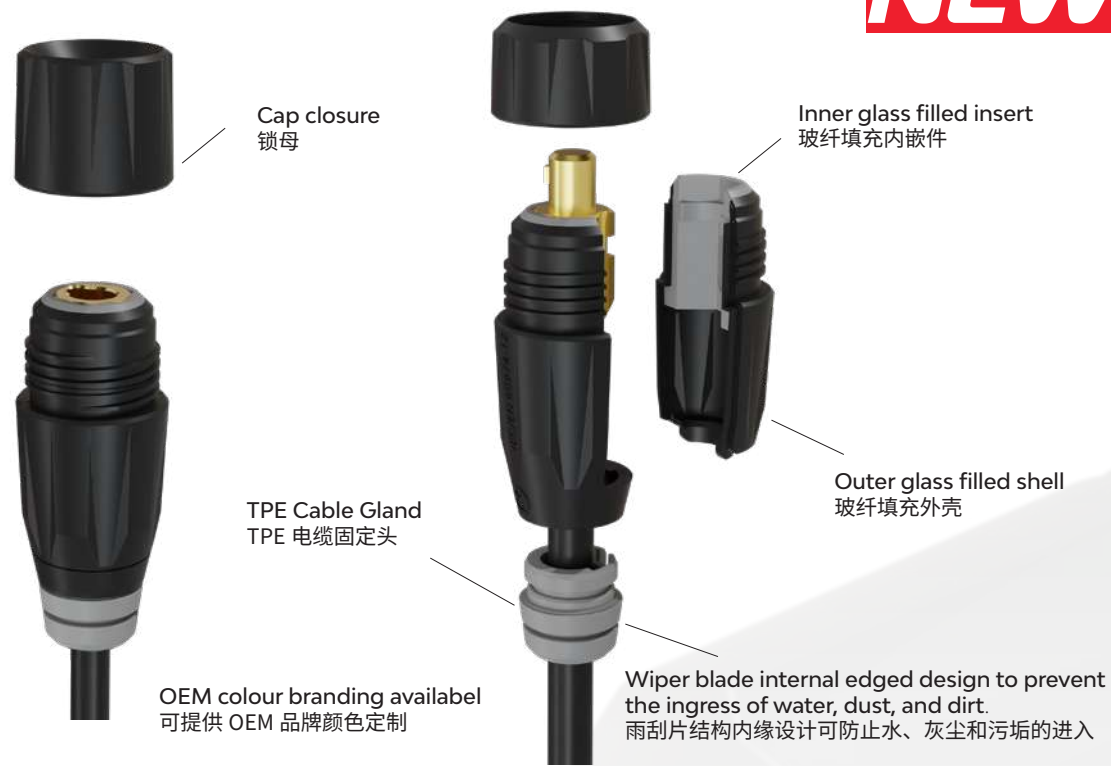

Technical Data 参数	CX0020N	CX0022N	CX0025N	CX0024N	CX0040N	CX0042N	CX0043N	CX0044N
Type 类型	MALE	MALE	MALE	MALE	FEMALE	FEMALE	FEMALE	FEMALE
Rating 电流	200A	315A	400A	500A	200A	315A	400A	500A
Cable Size 电缆	16-25mm ²	25-50mm ²	50-70mm ²	70-95mm ²	16-25mm ²	25-50mm ²	50-70mm ²	70-95mm ²
Standard 标准	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12

CABLE CONNECTOR 500 AMP

NEW

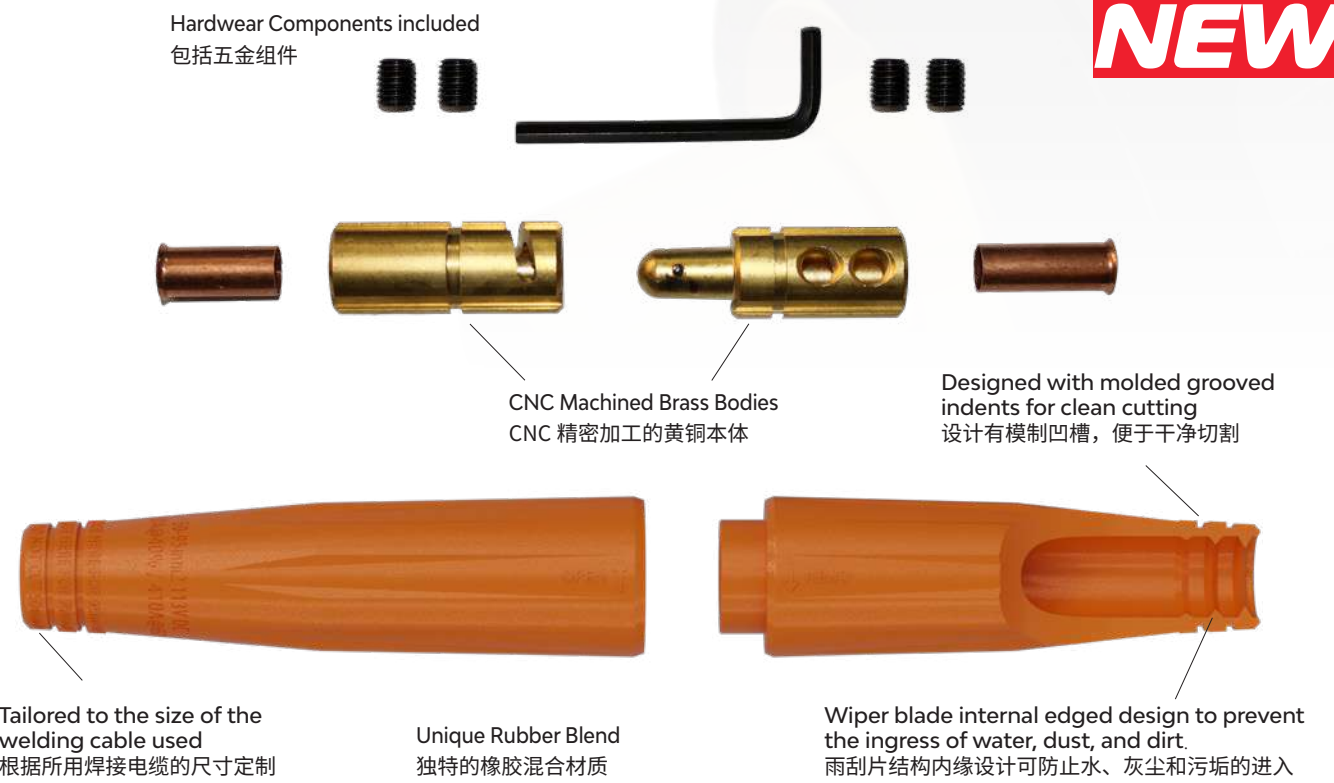

Technical Data 参数	29-044	29-022
Cable Size 电缆尺寸	25-70mm ²	50-95mm ²

DINSE STYLE CABLE CONNECTORS



CNC machined consumable parts . 高质量的配件。



Special blend of rubber materials. 特殊橡胶混合材料。



Conforms to CE, EN 60974-12. 符合 EN 60974-12 标准。



Secure connection. 安全连接。



High current carrying capacity. 大电流承载。



Technical Data 参数	CX0020	CX0021	CX0022	CX0025	CX0024
Type 类型	MALE	MALE	MALE	MALE	MALE
Rating 电流	200A	250A	315A	400A	500A
Cable Size 电缆	25mm²	35mm²	50mm²	75mm²	95mm²
Standard 标准	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12

CX0040	CX0041	CX0042	CX0043	CX0044
FEMALE	FEMALE	FEMALE	FEMALE	FEMALE
200A	250A	315A	400A	500A
25mm²	35mm²	50mm²	70mm²	95mm²
EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12

DINSE STYLE PANEL SOCKET



Technical Data 参数	CX0010	CX0072	CX0073	CX0030	CX0058
Type 类型	MALE	MALE	MALE	FEMALE	FEMALE
Rating 电流	200A	400A	500A	200A	400A
Cable Size 电缆	10-25mm²	35-70mm²	70-95mm²	10-25mm²	35-70mm²
Standard 标准	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12

CX0059	CX0012	CX0013	CX0031	CX0032
FEMALE	MALE	MALE	FEMALE	FEMALE
500A	400A	500A	400A	500A
70-95mm²	35-70mm²	70-95mm²	70-95mm²	35-70mm²
EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12	EN 60974-12

TIG DINSE STYLE ADAPTORS



CNC machined consumable parts. 高质量的配件。



Special blend of rubber materials. 特殊橡胶混合材料。



Secure connection. 安全连接。



High current carrying capacity. 大电流承载。



CNC machined consumable parts. 高质量的配件。



Special blend of rubber materials. 特殊橡胶混合材料。



Secure connection. 安全连接。



High current carrying capacity. 大电流承载。

Technical Data 参数	LDT1820L
Type 类型	MALE
Rating 电流	350A
Screw Size 螺纹	7/8-14 UNF L.H
Dinse Size 尺寸	35-50mm ²
Torch 枪型	18/20



Technical Data 参数	DT-5058
Type 类型	MALE
Rating 电流	350A
Screw Size 螺纹	7/8-14 UNF L.H
Dinse Size 尺寸	35-50mm ²
Torch 枪型	18/20



DINSE STYLE ADAPTORS



Technical Data 参数	LD1076	LD1076F	LDA	LD1076L
Type 类型	MALE	MALE	MALE	LUG
Rating 电流	250A	400A	400A	500A
Convert 转换形式	DINSE TO DINSE 35/70mm ² Female -10/25mm ² Male	JAPANESE TO DINSE 300/500Amp Female -35/70mm ² Male	HOLE TO DINSE φ15.9-35/70mm ²	JAPANESE TO LUG 300/500Amp Female -φ13mm Hole

TIG TORCH CONNECTOR AND ADAPTOR



Technical Data 参数	PCA 2	45V11
Description 描述	Tig Torch Connector	Power Cable Adaptor
Mounting Size Stud/ Hole 安装尺寸	1/2-13 unc	17mm Dia Hole
Connection Threads 连接螺纹	5/8-18 UNF To 5/8-18 UNF	7/8-14 UNF LH TO 5/8-18 UNF LH

MEASUREMENT GUAGE




Key Ring




Laser Engraving



Metric Reading



Measures Throat



Measures Leg Length



Technical Data 参数	29-039
Material and Thickness 材料及厚度	Stainless Steel 1mm
Fillet Leg Length	3.5/6/8/10/12/16/20/25 mm
Fillet Throat	2.5/4.2/5.7/7.1/8.5/11.3/14.1/17.7 mm

General Information

- 1. This catalogue renders all previous catalogues invalid.
- 2. No claims can be made based on the specification, product information, product appearance in this catalogue.
The design, technology, colours, features are subject to change.
- 3. Original NORTH products can be recognised by their series colours and or components markings.
- 4. All trademark/ Part Number printed in this catalogue are the property of their respective owners and are for reference purposes only. All Trademarks/Part Numbers are in no way connected or affiliated with Jinan North Welding Tools Co Ltd.

This catalogue contains numerous combinations of torches and accessories designed for different applications and different kinds of users. We advise contacting NORTH directly or a representative in your part of the world.

NORTH distributors can provide you with individual advice regarding the best combination to suit your needs.